



Financiado por  
la Unión Europea  
NextGenerationEU



Plan de Recuperación,  
Transformación  
y Resiliencia

**UNICO**  
I+D



## SUCCESS-6G: EXTEND

### WP2 Deliverable E5

#### Use case description, service requirements, and key performance indicators

Project Title:	SUCCESS-6G-EXTEND
Title of Deliverable:	Use case description, service requirements, and key performance indicators
Status-Version:	v1.1
Delivery Date:	31/10/2023
Contributors:	Carmen Vicente, Javier Santaella (Cellnex), Charalampos Kalalas, Ricard Vilalta, Raul Muñoz, Roshan Sedar, Pavol Mulinka, Miquel Payaro, Adriano Pastore, Jesus Gomez (CTTC), Joan Ramon Balasch, Miguel Fornell, Francisco Paredes (IDNEO), Jose Cunha, Guillermo Candela (Optare) Angelos Antonopoulos, Maria Serrano (Nearby Computing)
Lead editor:	Cellnex
Reviewers:	Charalampos Kalalas (CTTC)
Keywords:	use cases; user stories; innovations' description; service level requirements; key performance indicators; facilities

## Document revision history

Version	Date	Description of change
v0.1	31/05/23	Table of Contents (ToC) and initial content added
v0.2	06/06/23	First content added related to the user stories and general use case description
v0.3	16/06/23	Modification of ToC to include SUCCESS-6G innovations' descriptions. Additional content was added to user stories' descriptions.
v0.4	30/06/23	Information gathered from workshops was added to use case and user stories sections, and content on innovation and facilities was added.
v0.5	14/07/23	Content added
v0.6	28/07/23	Content added; reformulation of innovations and facilities
v0.7	04/08/23	Content added; updates on service level requirements section
v0.8	25/08/23	Content added; overall quality check; additions of references; updates on figures
v1.0	31/08/23	Final version, upload to the website
v1.1	31/10/23	Updates to Section 6, upload to the website

## Disclaimer

This report contains material which is the copyright of certain SUCCESS-6G Consortium Parties and may not be reproduced or copied without permission. All SUCCESS-6G Consortium Parties have agreed to publication of this report, the content of which is licensed under a Creative Commons Attribution-NonCommercial-NoDerivs 3.0 Unported<sup>1</sup>.



CC BY-NC-ND 3.0 License – 2022-2024 SUCCESS-6G Consortium Parties

## Acknowledgment

The research conducted by SUCCESS-6G - TSI-063000-2021-39/40/41 receives funding from the Ministerio de Asuntos Económicos y Transformación Digital and the European Union-NextGenerationEU under the framework of the “Plan de Recuperación, Transformación y Resiliencia” and the “Mecanismo de Recuperación y Resiliencia”.

<sup>1</sup> [http://creativecommons.org/licenses/by-nc-nd/3.0/deed.en\\_US](http://creativecommons.org/licenses/by-nc-nd/3.0/deed.en_US)

## Executive Summary

The key research objectives underpinning SUCCESS-6G-EXTEND reside on the design of a robust framework that builds on the extracted knowledge from vehicular streams to offer: i) *real-time vehicle condition monitoring and fault provisioning*, and ii) *over-the-air vehicular software updates in an autonomous manner*.

This deliverable establishes the initial technical foundations on top of which the SUCCESS-6G-EXTEND solutions will be developed. This includes, on the one hand, the elaboration of the SUCCESS-6G vehicular use cases that will be targeted by EXTEND, and, subsequently, the initial set of innovations that will be developed by project partners to address the technical challenges associated with these use cases. For each use case, a user story has been defined, providing a high-level description of the scenarios targeted by SUCCESS-6G-EXTEND. Each user story describes the overall scenario and services to be supported, the involved actors and their roles, the flow of events that form the services, relevant pre-conditions, requirements or constraints, and other information. In addition, a brief description of the lab and real-environment facilities available to the consortium is given, which will be leveraged and extended within the context of the project to develop and showcase the SUCCESS-6G-EXTEND technical innovations and demonstrations. Finally, an initial set of service level requirements and key performance indicators are defined for each use case.

The deliverable is structured in the following sections:

- Introduction.
- Use Case 1 “Vehicular condition monitoring and fault provisioning” and User Story description.
- Use Case 2 “Automated software updates for vehicles” and User Story description.
- SUCCESS-6G-EXTEND innovations.
- Use case facilities.
- Key performance indicators.
- Conclusions.

## Table of Contents

<b>Executive Summary .....</b>	<b>3</b>
<b>Table of Contents .....</b>	<b>4</b>
<b>List of Figures .....</b>	<b>6</b>
<b>List of Tables .....</b>	<b>7</b>
<b>1      Introduction .....</b>	<b>8</b>
<b>2      Use case 1: Vehicular condition monitoring and fault provisioning.....</b>	<b>9</b>
2.1    General description and overall objectives .....	9
2.2    User story: Vehicular condition monitoring with robust V2X connectivity.....	10
<b>3      Use case 2: Automated software updates for vehicles .....</b>	<b>14</b>
3.1    General description and overall objectives .....	14
3.2    User story: Over-the-air vehicular software updates with robust V2X connectivity .....	15
<b>4      SUCCESS-6G-EXTEND innovations .....</b>	<b>18</b>
4.1    Innovations that apply to both Use Cases .....	19
4.1.1    5G Architecture enhancements to support V2X services.....	19
4.1.2    Mobile Edge Computing .....	19
4.1.3    User Plane Function reselection.....	20
4.1.4    5G Slicing .....	22
4.1.5    Location Management Function .....	22
4.1.6    C-V2X OBU .....	23
4.1.7    Dynamic 5G Core deployment and orchestration.....	24
4.1.8    Closed-loop service orchestration.....	24
4.2    Innovations that apply only to Use Case 1 .....	26
4.2.1    Techniques driven by ML to assess, reconstruct and impute missing information .....	26
4.2.2    Imputation of incomplete vehicular measurement streams .....	26
4.2.3    End-to-end condition monitoring, failure identification, and visualization for V2X systems .....	27
4.3    Innovation that applies only to Use Case 2 .....	27
4.3.1    Location-aware SDN controller and Service Orchestrator .....	27
<b>5      Use case facilities .....</b>	<b>29</b>
5.1    Facilities for both Use Cases .....	29
5.1.1    CELLNEX Mobility Lab .....	29
5.1.2    5G Stand Alone mobile network .....	32
5.1.3    Mobile Edge Computing infrastructure.....	36
5.1.4    MEC orchestrator and MEC platform .....	37
5.1.5    C-V2X infrastructure .....	38
5.1.6    C-V2X OBU .....	39

---

5.2	Facilities for Use Case 1 .....	41
5.2.1	SUPERCOM platform .....	41
5.3	Facilities for Use Case 2 .....	41
5.3.1	ADRENALINE Testbed .....	41
<b>6</b>	<b>Key performance indicators .....</b>	<b>43</b>
6.1	User story: Vehicular condition monitoring with robust V2X connectivity .....	43
6.2	User story: Over-the-air vehicular software updates with robust V2X connectivity .....	44
6.3	5G network relevant KPIs .....	45
<b>7</b>	<b>Conclusions .....</b>	<b>48</b>
<b>8</b>	<b>References .....</b>	<b>49</b>

## List of Figures

Figure 1: Implementation phases for a vehicular predictive maintenance service .....	9
Figure 2: Use Case 1 - User Story diagram .....	11
Figure 3: Use Case 1 - Vehicle data domains .....	12
Figure 4: Implementation phases for the automated software updates.....	14
Figure 5: Use Case 2 - User Story diagram .....	15
Figure 6: Use case 1, relevant user story and mapping of technical contributions.....	19
Figure 7: Use case 2, relevant user story and mapping of technical contributions.....	19
Figure 8: The Raemis Enterprise Slice .....	20
Figure 9: MEC Distributed Resilient Core.....	20
Figure 10: 3GPP UPF reselection modes .....	21
Figure 11: Raemis UPF reselection.....	21
Figure 12: 5G Slicing flow of functions.....	22
Figure 13: Location Management Function (LMF).....	23
Figure 14: NearbyOne Marketplace for SUCCESS-6G-EXTEND subproject .....	24
Figure 15: Closed-loop service orchestration in SUCCESS-6G-EXTEND project.....	26
Figure 16: CELLNEX Mobility Lab (Castelloli).....	29
Figure 17: Cellnex Mobiliy Lab - Green Nodes .....	30
Figure 18: Cellnex Mobility Lab - ICT Architecture.....	31
Figure 19: Raemis™ Druid Core Solution - 5G SA Network .....	32
Figure 20: Network Slicing.....	33
Figure 21: Dashboard panel.....	34
Figure 22: 5G-NR Sunwave BBU - nCELL-T5000 .....	35
Figure 23: 5G-NR Sunwave RRU - RU4370 .....	36
Figure 24: Cellnex Mobility Lab - ICT Infrastructure .....	37
Figure 25: MEC orchestrator and MEC platform.....	37
Figure 26: C-V2X RSU.....	38
Figure 27: C-V2X OBU for a vehicular predictive maintenance service. ....	40
Figure 28: Building blocks of SUPERCOM platform.....	41
Figure 29: CTTC Adrenaline Testbed.....	43

## List of Tables

Table 1: Description of user story for use case 1 .....	13
Table 2: Description of user story for use case 2 .....	17
Table 3: KPIs for user story of use case 1 .....	44
Table 4: KPIs for user story of use case 2.....	45
Table 5: Network KPIs that can be extracted from the core.....	46
Table 6: Network KPIs that can be extracted from the final user (e2e).....	47

## 1 Introduction

Modern vehicles are progressively transforming into sophisticated computing units able to gather, process, and exchange information with each other and with relevant entities. Equipped with on-board units, vehicles are able to perform sensor data interactions with neighbouring vehicles, roadside units (RSUs) and cloud applications, over wireless connectivity. SUCCESS-6G-EXTEND will bring several novelties for emerging vehicular services in 5G-enabled networks. To showcase these contributions, two use cases have been selected and will be thoroughly studied in the context of the project.

In order to provide a common framework for the work to be conducted in SUCCESS-6G-EXTEND, the following approach has been adopted, inspired by the methodology proposed by 5GAA to describe scenarios in the automotive domain, with the necessary adaptations required to capture the specific characteristics of the SUCCESS-6G scenarios. In that sense, two levels of description have been defined: *use case* and *user story*. The use cases provide the overarching scenarios for the coordinated SUCCESS-6G project, focusing respectively on ***vehicular condition monitoring and fault provisioning*** and ***automated software updates for vehicles***. For each use case, a user story has been defined, corresponding to the EXTEND subproject of SUCCESS-6G. Each user story describes the overall scenario and service to be supported, the involved actors and their roles, the flow of events that form the service, relevant pre-conditions, requirements/constraints, and other information.

With these elements in place, a list of SUCCESS-6G-EXTEND innovations has been identified, capturing the key technical challenges that will be addressed in the context of the project, and bringing added value to the defined user stories. These innovations will be the starting point for the technical contributions to be developed within WP3-5 and will be validated within the aforementioned WPs, as well as through SUCCESS-6G-EXTEND proof-of-concept demonstrations to be specified within WP4-5. To this end, use case facilities and key performance indicators are specified in Sections 5 and 6 respectively.

## 2 Use case 1: Vehicular condition monitoring and fault provisioning

### 2.1 General description and overall objectives

Vehicle manufacturers are expected to highly benefit from AI-based predictive maintenance services to implement automatic condition monitoring in on-board vehicular equipment. In this context, data-driven mechanisms analysing historical data and real-time information from vehicles are essential to identify irregular functional conditions/patterns in monitoring information, leading to predictive maintenance tailored to the needs of each individual piece of equipment. In turn, the detection of anomalies reduces unplanned downtime and costs, by quickly providing an estimate about when the equipment is expected to fail.

C-V2X technology and infrastructure enable vehicles to exchange real-time data related to their operating conditions, performance, and maintenance needs with infrastructure and service providers. Furthermore, C-V2X secure connectivity could enable service providers to remotely access a vehicle's onboard diagnostics and troubleshoot issues without physically being present saving time and costs associated with traditional on-site inspections. Of particular importance are the AI-empowered visualization tools and customized dashboards, which support tailored queries and provide a wide range of charting capabilities, e.g., trajectory graphs and trend maps, for analysing and presenting the monitoring information to interested stakeholders.



Figure 2: Implementation phases for a vehicular predictive maintenance service

As illustrated in Figure 1, the implementation **phases** for a vehicular predictive maintenance service comprise: i) identification of the critical assets in a vehicle, ii) acquisition of monitoring information, iii) data fusion and transmission, iv) establishment of a database for storage of historical data, v) analysis of failure modes and failure predictions and vi) decision-making. Maintenance is then only performed when data analytics indicate that performance has degraded, or a failure is likely to occur.

Modern vehicles' electrical and electronic systems are managed by various electronic control units (ECUs) which use the Controller Area Network (CAN) bus to exchange real-time information, including:

- Engine parameters such as load, coolant temperature, throttle position, and mass air flow (MAF).
- Vehicle speed.
- Transmission data such as gear position, shift requests, torque converter lockup status, and transmission temperature.
- ABS and stability control data on wheel speed, brake pressure, and yaw rate.
- Instrument cluster data such as speed, fuel level, warning lights, and other vehicle-related information to display to the driver.
- Climate control such as HVAC (Heating, Ventilation, and Air Conditioning).

Specific information available on the CAN bus can vary depending on the vehicle's make, model, and original equipment manufacturers (OEM). Most part of this data can be sampled through the On-Board Diagnostics (OBD) port by constant polling.

The overall **objectives** of this use case can be summarized as follows:

- Real-time condition monitoring of vehicular assets.
- Identification and classification of abnormal system behaviour.
- Minimization of the number of unexpected breakdowns.

- Safety improvement.
- Vehicular equipment's lifespan can be optimized to its fullest.
- Reduction of operational costs by performing maintenance only when necessary.
- Maximization of production hours.
- Maintenance costs are streamlined through reduced equipment, inventory costs and labour.

The key **stakeholders** involved in the use case are:

- The **Mobile Network Operator (MNO)**, providing wireless connectivity between the vehicle, the edge monitoring infrastructure, and the remote maintenance center. The MNO is interested in optimizing the network operation by enhancing its energy efficiency and coverage, while offering novel services to accommodate more users.
- The **edge infrastructure provider**, offering and managing computational resources at the edge and supporting real-time services as well as virtualized network functions and AI-empowered algorithms for advanced computational tasks.
- The **maintenance team**, entitled with the remote supervision of the vehicular condition indicators and health status.
- The **equipment provider**, providing in-vehicle monitoring infrastructure, such as hardware components and sensor devices, to be deployed in the vehicle for condition supervision purposes.
- The **software developers**, devising and applying data-processing modules for the aggregated measurement streams to determine the condition of vehicular equipment and predict when maintenance actions should be performed.
- The **cloud providers** can optionally be involved, offering additional computational resources to host the service.

Note that, without loss of generality, some stakeholders may assume multiple roles or, equally, some roles may be assumed by multiple stakeholders. For instance, the MNO could also be the owner of the edge infrastructure, or an equipment provider may act as responsible for the vehicle maintenance or outsource it to a third party.

## 2.2 User story: Vehicular condition monitoring with robust V2X connectivity

This section contains the user story defined in the context of the SUCCESS-6G-EXTEND subproject for the first use case. We provide the details in the following table.

User story name	Vehicular condition monitoring with robust V2X connectivity
Subproject	EXTEND
User story description	A C-V2X infrastructure provides coverage to the connected vehicle throughout its trajectory for monitoring purposes. However, wireless transmission of in-vehicle monitoring data comes inadvertently with challenges which involve distortions and missing data owing to the inherently shared wireless medium. Incomplete vehicular data attributed to either increased interference levels, channel attenuation phenomena or sensor malfunctioning may lead to incorrect decision-making and failure to predict maintenance actions. Addressing the degradation of transmitted V2X data is thus essential for high-fidelity estimation of the system network state and informed actions. In this context, machine learning (ML)-empowered signal reconstruction and imputation techniques are expected to obtain accurate estimates of incomplete sensor trajectories by leveraging the intrinsic spatiotemporal synergies of captured information. By deeply investigating the interplay between vehicle dynamics and fault

	<p>provisioning, faulty vehicular equipment will be timely detected/predicted, improving road safety by preventing critical failures.</p>
<b>Illustration</b>	<p>The following diagram illustrates the flow of the main events taking place in the user story:</p>
	<p><i>Figure 3: Use Case 1 - User Story diagram</i></p>
<b>Main event flow</b>	<ol style="list-style-type: none"> <li>1. Data is captured from OBD port where ECU information from sensors installed in the vehicle is available.</li> <li>2. Transmission to the edge monitoring infrastructure takes place with the aid of a vehicular on-board unit (OBU) which fuses aggregated information from various sensors and a C-V2X roadside infrastructure which comprises mobile radio stations and/or road-side units (RSU).</li> <li>3. Measurement streams are aggregated and processed at the edge monitoring units. Aggregated information can be directly or indirectly used for downstream tasks: i) assessment of the V2X network impairments on inference; ii) reconstruction of missing information; iii) performance of fault detection/classification when tolerating or imputing missing information.</li> <li>4. Based on the knowledge extracted and with the help of appropriate visualization tools and platforms, instructive and actionable insights are derived by the maintenance team towards an enhanced end-to-end performance, e.g., flag whether a fault has occurred and diagnose its type in event-detection operations.</li> <li>5. Appropriate actions, e.g., alerts, modification of sensor reporting frequency, are communicated back to the vehicle as a response to the automated supervision of measurement flows.</li> </ol>
<b>Alternative event flow</b>	<p>Knowledge extraction at the edge monitoring infrastructure may be assisted by historical event logs and life expectancy statistics to predict when maintenance activities will be required.</p>
<b>Actors</b>	<p>Automaker/OEM, OBU, roadside C-V2X and edge infrastructure operator, MEC platform, MNO, service provider, maintenance team.</p>
<b>Vehicle role</b>	<p>Vehicle is equipped with monitoring sensors which acquire status information related to various vehicular operations. The vehicle communicates monitoring information and other data to the infrastructure and receives in response</p>

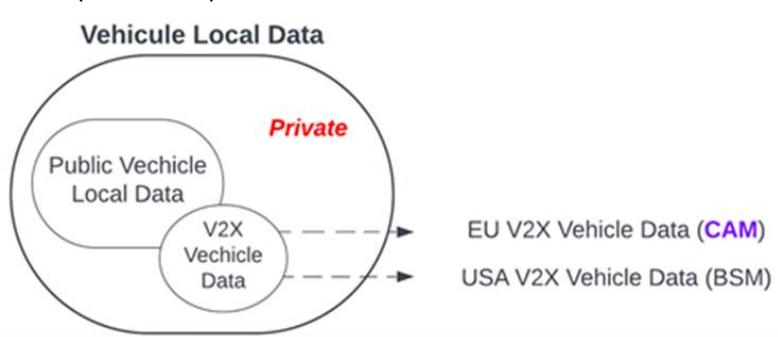
	information from the edge infrastructure.
<b>Infrastructure role (including edge, cloud, and communications infrastructure)</b>	<ul style="list-style-type: none"> <li>Communication infrastructure provides C-V2X connectivity between the vehicle, the roadside infrastructure, the edge platform and other involved connected actors (e.g., maintenance centre).</li> <li>Edge monitoring infrastructure aims at storing, processing, analysing, and responding to data close to the acquisition points, enabling dramatically faster processing times and localized decision-making.</li> </ul>
<b>Service provider</b>	<ul style="list-style-type: none"> <li>Service provider performs appropriate actions: alerts, modification of sensor reporting frequency, and communication back to the vehicle.</li> </ul>
<b>Other actors' roles</b>	<ul style="list-style-type: none"> <li>MEC Orchestrator provides lifecycle management functionalities of the vehicular condition monitoring services into the edge infrastructure.</li> <li>The MNO provides the wireless connectivity necessary for data transmission from the on-board units to the monitoring infrastructure.</li> <li>The maintenance team offers situational awareness and appropriate supervisor actions for informed decision-making, e.g., about when vehicular maintenance should be performed.</li> </ul>
<b>Pre-conditions</b>	Availability of a scalable and reliable underlying communication system capable of supporting vehicular data transmission towards computing units, being them edge- or cloud-based (if needed, to perform computationally heavy tasks).
<b>Post-conditions</b>	<ul style="list-style-type: none"> <li>Predictive diagnostics allow for instructive and actionable insights to be derived towards enhanced end-to-end performance, e.g., flag whether a fault has happened or is about to happen and diagnose its type in event-detection operations.</li> <li>Assessment of the data reconstruction performance of applied techniques for addressing vehicular channel distortions.</li> </ul>
<b>Information requirements</b>	Information (e.g., event log data) pertaining to the condition of vehicular components. Such information originates from captured sensor data and/or equipment status reports.
<b>Constraints/Presumptions</b>	<p>Part of information available on the CAN bus is proprietary data and exclusively accessible to the car manufacturer and its licensed partners. The following diagram illustrates how data is distributed within the vehicle, differentiating between the public and private domains.</p>  <p><b>Vehicle Local Data</b></p> <p>Private</p> <p>Public Vechicle Local Data</p> <p>V2X Vechicle Data</p> <p>EU V2X Vehicle Data (CAM)</p> <p>USA V2X Vehicle Data (BSM)</p>

Figure 4: Use Case 1 - Vehicle data domains

Vehicular assets/conditions to be monitored should have a high failure occurrence ratio however, the accessibility to such information may be a constraint. As data is collected through the OBD connector which is connected to the CAN bus through a gateway, this device introduces a delay in the data acquisition which can range between 5ms and 50ms. Therefore, the response

	<p>time of the gateway will condition the frequency at which the information is uploaded to the database. Approximately, it is expected that every 800/1.200 ms the database will be updated with a data packet containing multiple sensor values.</p> <p>When vehicle moves along the road, can use roaming functions to connect to different MNO networks and keep the connectivity services. In SUCCESS-6G project roaming will not be considered, as the vehicle will remain always inside the same MNO network.</p>
<b>Geographic scope</b>	ParcMotor Circuit will be used for testing the use case providing a continuous 5G coverage area including two radio stations to test connectivity robustness while cell handover.

*Table 1: Description of user story for use case 1*

### 3 Use case 2: Automated software updates for vehicles

#### 3.1 General description and overall objectives

Over-the-air software updates are delivered remotely from a cloud-based server, through a cellular connection, to the connected vehicle with the aim of providing new features and updates to the vehicle's software systems. Such software updates may include changes to any software that controls the vehicle's physical parts or electronic signal processing system. In practice, the updates often tend to apply more to user interfaces like infotainment screens and navigation (i.e., vehicle maps). The update procedure, when performed over-the-air, enables a vehicle's performance and features to be continuously up-to-date and improved. The integration of advanced data analytics, automated and remote service delivery eliminates the need for visiting repair/service centres, while technological advancements in these updates give vehicle manufacturers the freedom to constantly "freshen up" finished products remotely. C-V2X technology plays a crucial role for the update process, enabling efficient, scalable and seamless wireless communication between vehicles and software management platforms. Figure 4 illustrates the implementation phases for this use case.



Figure 5: Implementation phases for the automated software updates

The overall **objectives** of this use case can be summarized as follows:

- Safer and more entertaining driving experience.
- Hardware and software components maintained and updated regularly during a vehicle's lifespan, implying a slower rate of depreciation.
- Prevention of cyberattacks targeting outdated software.
- Compliance to new rules and standards.
- Lower repair costs and elimination of labour charges.
- Lower warranty costs for manufacturers and lower downtime for customers

The key **stakeholders** involved in the use case are:

- The **Mobile Network Operator (MNO)**, providing wireless connectivity between the vehicle, the edge computing infrastructure, and the vehicular software management system. The MNO is interested in optimizing the network operation by enhancing its energy efficiency and coverage, while offering novel services to accommodate more users.
- The **edge infrastructure provider**, offering and managing computational resources at the edge and supporting real-time services as well as virtualized network functions and AI-empowered algorithms for advanced computational tasks.
- The **equipment provider**, providing in-vehicle embedded devices, e.g., hardware components and sensor devices, that can be remotely reconfigured and updated.
- The **vehicular software management system**, operated by the equipment provider or vehicle manufacturer, is responsible for issuing periodically new software updates.
- The **software developers**, devising and applying data-processing modules for automated update of vehicular components' software.
- The **cloud providers** can optionally be involved, offering additional computational resources to host the service.

Note that, without loss of generality, some stakeholders may assume multiple roles or, equally, some roles may be assumed by multiple stakeholders. For instance, the MNO could also be the owner of the edge infrastructure, or an equipment provider may also be responsible for the operation of the vehicular software management system or outsource it to a third party.

### 3.2 User story: Over-the-air vehicular software updates with robust V2X connectivity

This section contains the user story defined in the context of the SUCCESS-6G-EXTEND subproject for the second use case. We provide the details in the following table.

<b>User story name</b>	<i>Over-the-air vehicular software updates with robust V2X connectivity</i>
<b>Subproject</b>	EXTEND
<b>User story description</b>	Over-the-air software updates deliver critical information to on-board vehicular devices. Wireless channel impairments may, however, adversely impact the access to up-to-date content, issues' remediation, and availability of new vehicular features. Therefore, a robust V2X connectivity needs to be established among the vehicular software management system, the cloud/edge infrastructure, and the vehicle. To this end, edge-specific orchestration of dynamic vehicular software upgrades is necessary to address potential connectivity failures and re-provision <i>on-the-fly</i> the automation of updates. Service continuity can be thus guaranteed by properly balancing the load across the edge infrastructure to ensure lifecycle management. Robustness of the software update service can be further enhanced via a zero-touch closed loop.
<b>Illustration</b>	<p>The following diagram illustrates the flow of the main events taking place in the user story:</p> <p>The diagram illustrates the FOTA Architecture with the following components and their interactions:</p> <ul style="list-style-type: none"> <li><b>OBU (On-Board Unit):</b> Contains a <b>FOTA Manager</b> and a <b>BROKER</b>. It receives <b>IMAGE</b> files and sends them to the <b>BROKER</b>. The <b>BROKER</b> then sends them to the <b>VM-INSTANCE</b> via the <b>vmax-fota-broker</b> interface.</li> <li><b>VM-INSTANCE:</b> Contains a <b>Multi-Access Edge</b> and a <b>BROKER</b>. The <b>Multi-Access Edge</b> interacts with the <b>VM-INSTANCE</b> via the <b>vmax-fota-dw</b> interface. It also receives <b>RECONNECTION ORIENTED PROTOCOL</b> from the <b>BROKER</b> and sends data to the <b>BROKER</b> via the <b>vmax-fota-control</b> interface.</li> <li><b>IDNEO-SERVERS:</b> Contains a <b>BROKER</b> and a <b>VM-INSTANCE</b>. It receives <b>IMAGE</b> files and <b>POLICY</b> from the <b>VM-INSTANCE</b> via the <b>vmax-fota-upload</b> interface. It then sends <b>IMAGE</b> files to the <b>VM-INSTANCE</b> via the <b>vmax-fota-dw</b> interface.</li> <li><b>Database:</b> Connected to the <b>VM-INSTANCE</b> via the <b>vmax-fota-control</b> interface.</li> </ul> <p>Annotations below the diagram:</p> <ul style="list-style-type: none"> <li><b>vmax-fota-dw:</b> Interface on demand that downloads new image files</li> <li><b>vmax-fota-control:</b> Interface for permanent communication in order to exchange actions and status</li> <li><b>vmax-fota-upload:</b> Interface to upload new image files plus policies related to this new update</li> </ul> <p><b>Figure 6: Use Case 2 - User Story diagram</b></p>

<b>Main event flow</b>	<ol style="list-style-type: none"> <li>1. The vehicular software management system issues a new software update.</li> <li>2. The update is uploaded to the cloud where it is queued, downloaded, and verified by the target device over a cellular connection.</li> <li>3. Once verified, the system typically triggers an alert that prompts the vehicle owner to approve or decline the update.</li> <li>4. After confirming approval, the software package is delivered, and the update is installed in the vehicle. The software updates are integrated into the telematics control units to enable vehicle software to be seamlessly updated in the field.</li> <li>5. After installation, diagnostic information is sent back to the vehicular software management system as feedback.</li> </ol>
<b>Alternative event flow</b>	In case of difficulties in resilient point-to-region distribution of over-the-air vehicular software updates, the extension of orchestration mechanisms via the creation of multiple point-to-point connectivity segments will be explored.
<b>Actors</b>	Automaker/ECU, OBU, roadside C-V2X and edge infrastructure operator, MEC platform, MNO, service provider, vehicular software management system.
<b>Vehicle role</b>	Vehicle is equipped with embedded devices and hardware components that support remote software updates and configurability of their functionalities.
<b>Infrastructure role (including edge, cloud and communications infrastructure)</b>	<ul style="list-style-type: none"> <li>• Communication infrastructure provides C-V2X connectivity between the vehicle, the roadside infrastructure, the edge platform and other involved connected actors (e.g., software management system).</li> <li>• Edge infrastructure hosts storing and processing services for the software updates providing faster processing times, reduced backhaul bandwidth consumption and localized decision-making</li> </ul>
<b>Service provider</b>	<ul style="list-style-type: none"> <li>• The vehicular software management system makes usage of monitoring protocols for verifying the state of software updates and generate decision actions for the edge-specific orchestrator. It is also responsible for the configuration, management and quality control of the updates. It further defines the update requirements and ensures updates are executed safely and will not affect the safety or certification of vehicles. Finally, it ensures compliance with the existing regulations for the delivery of software updates.</li> </ul>
<b>Other actors' roles</b>	<ul style="list-style-type: none"> <li>• MEC Orchestrator provides lifecycle management functionalities of the software updates and application services into the edge infrastructure.</li> <li>• The MNO provides bidirectional wireless connectivity necessary for the download of the updates and any other message exchange related to the verification of the downloaded content.</li> </ul>
<b>Pre-conditions</b>	<ul style="list-style-type: none"> <li>• Availability of a scalable and reliable underlying communication system capable of supporting vehicular data transmission towards computing units, being them edge- or cloud-based (if needed, to perform computationally heavy tasks).</li> <li>• Over-the-air software update platform needs to be compatible with</li> </ul>

	the operating systems and the remotely connected in-vehicle network, to update vehicle software and features in the field while collecting real-time operational data.
<b>Post-conditions</b>	<ul style="list-style-type: none"> <li>Edge-specific orchestration of dynamic upgrades, patching, and re-provisioning on-the-fly for automation of software updates and application lifecycle management.</li> <li>Efficient infrastructure/service data mining and on-boarding of containerized AI blocks for zero-touch orchestration.</li> </ul>
<b>Information requirements</b>	Information (e.g., event log data) pertaining to the condition of vehicular components, including vehicle location. Such information originates from captured sensor data and/or equipment status reports. Network data pertaining to edge servers and L0/L3/L4 related data.
<b>Constraints/Presumptions</b>	<p>The OBU is equipped with an embedded external flash eMMC of 8 GByte, which should not be an issue since the size of the OBU image is smaller.</p> <p>Vehicle will remain always connected to the same MNO network. Thus, roaming functions won't be used in the project to keep the communication services.</p>
<b>Geographic scope</b>	ParcMotor Circuit will be used for testing the use case providing a continuous 5G coverage area including two radio stations in order to test connectivity robustness while cell handover.

*Table 2: Description of user story for use case 2.*

## 4 SUCCESS-6G-EXTEND innovations

This section covers the different technological innovations that will be explored within the SUCCESS-6G-EXTEND subproject for use case 1 and 2. The innovations will be developed and validated during the subproject lifetime within the corresponding WP scope and showcased if successfully implemented and tested in the final demos.

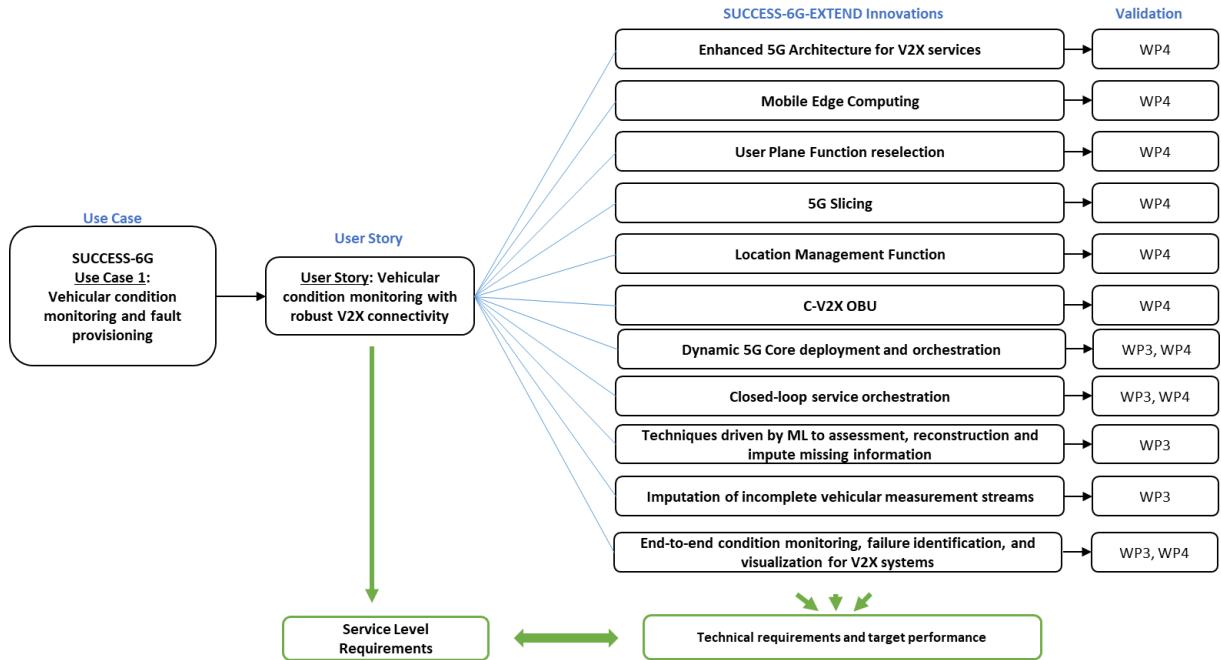


Figure 6: Use case 1, relevant user story and mapping of technical contributions.

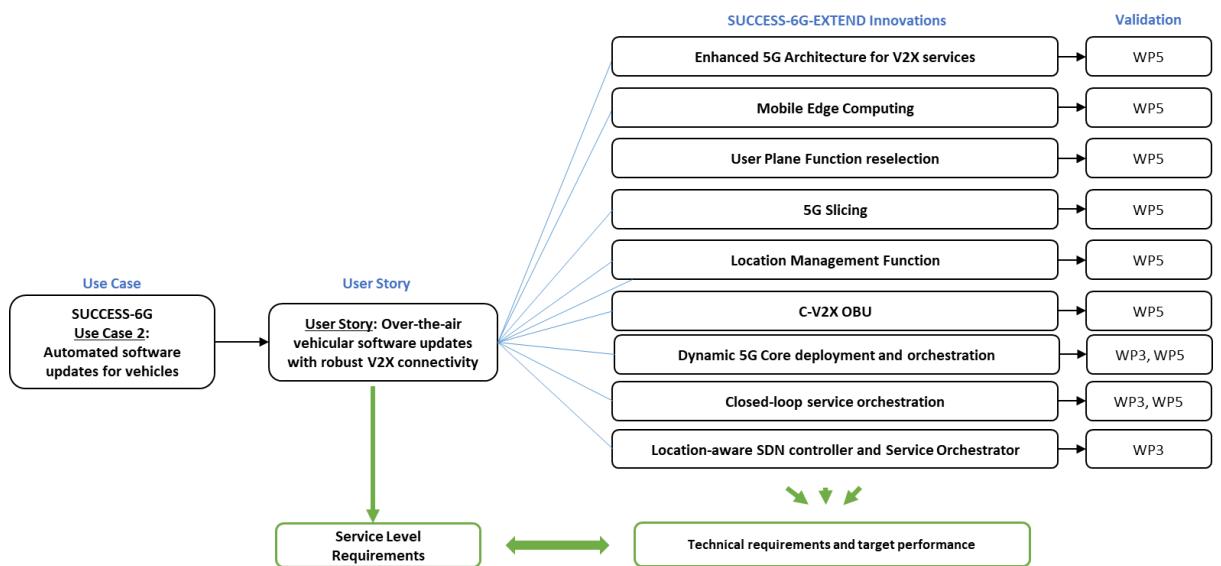


Figure 7: Use case 2, relevant user story and mapping of technical contributions

The identified SUCCESS-6G-EXTEND innovations and their mapping to user stories and WPs are illustrated in Figure 6 and Figure 8 for use case 1 and use case 2, respectively.

## 4.1 Innovations that apply to both Use Cases

### 4.1.1 5G Architecture enhancements to support V2X services

ETSI TS 123 287<sup>2</sup> is a technical specification defined by the European Telecommunications Standards Institute (ETSI). The main objective of ETSI TS 123 287 is to standardize the "Application Layer (AP) for V2X (Vehicle-to-Everything) communication systems."

5G System to be deployed in SUCCESS-6G-EXTEND subproject will follow main enhancements for 5G systems to support V2X services specified in ETSI TS 123 287. These architectural improvements focus on vehicular communication and enable the efficient delivery of V2X services over PC5 and Uu reference points.

One of the key improvements at the Uu reference point is the support for 5G Core (5GC) network integration. Project's 5G Core solution ensures seamless connectivity and communication between V2X devices and the 5G network which includes roaming and non-roaming scenarios, inter-PLMN, Application Function (AF) based services and service-based interfaces. This integration enables the delivery of advanced V2X services, such as real-time traffic information, vehicle platooning, and enhanced road safety features.

### 4.1.2 Mobile Edge Computing

Mobile Edge Computing is the concept of implementing more of the communications handling at the Edge of the network, closer to the cellular radio coverage. This is in contrast to previous centralised core network architectures which bring user traffic to a central point in the network before processing can take place.

Two models of Edge Computing are supported by the Raemis<sup>3</sup> platform that compose the Core of the network. The basic model is pure MEC data plane offload. This model has been promoted by the ETSI MEC working group and an overview of the Raemis support for this model is provided in the next section.

Nevertheless, the MEC data plane offload model is not an effective approach in providing resilience and survivability to the network Edge. To address this requirement, which is key for critical communications use cases, the Raemis platform provides the distributed Edge Core model which provides fully resilient service at the network edge in addition to the data plane offload capabilities.

---

<sup>2</sup> [https://www.etsi.org/deliver/etsi\\_ts/123200\\_123299/123287/17.06.00\\_60/ts\\_123287v170600p.pdf](https://www.etsi.org/deliver/etsi_ts/123200_123299/123287/17.06.00_60/ts_123287v170600p.pdf)

<sup>3</sup> <https://www.druidsoftware.com/raemis-cellular-network-technology/>

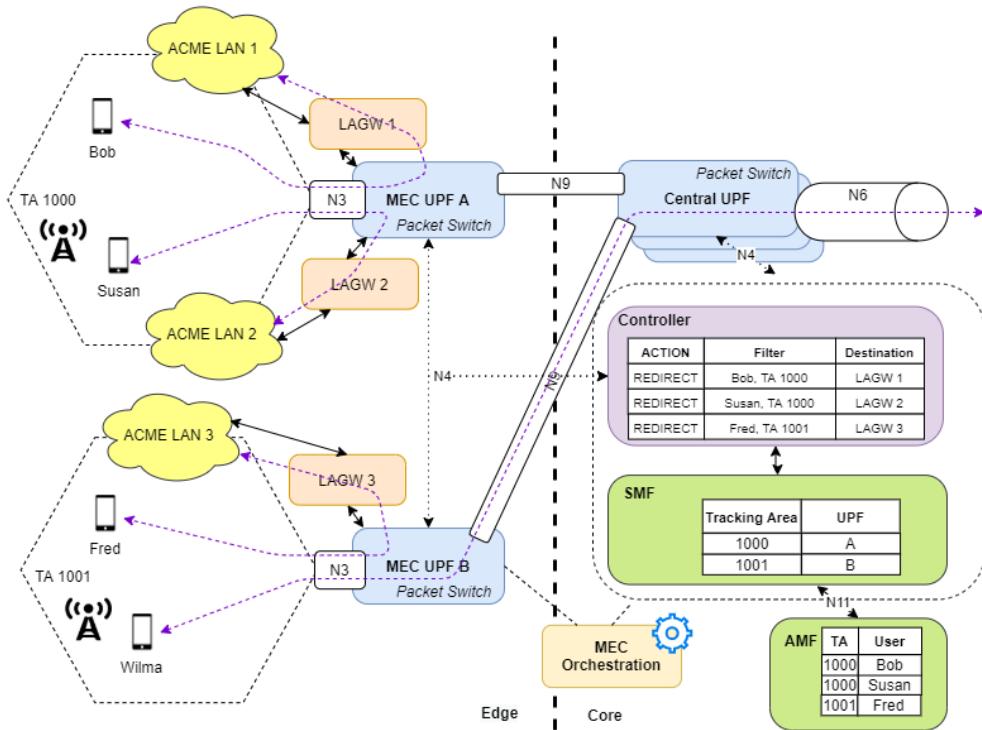


Figure 9: The Raemis Enterprise Slice

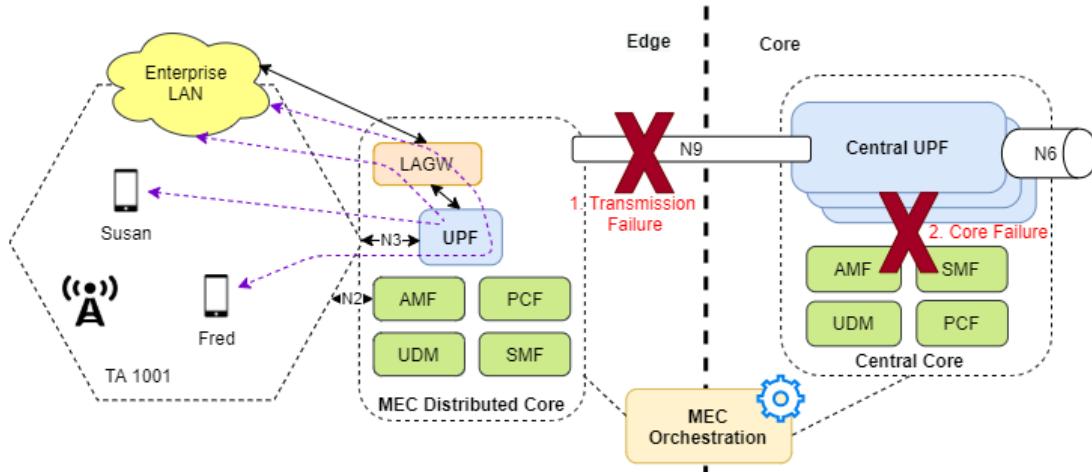


Figure 10: MEC Distributed Resilient Core

The distributed core model of delivering MEC services has the added advantage of being capable of delivering completely autonomous local service. This is particularly important for use cases requiring some form of critical services. The Edge core configuration is implemented as MEC slices by the orchestration function.

#### 4.1.3 User Plane Function reselection

Distributed UPF (User Plane Function) refers to the deployment of the 5G core network UPF functionality in a distributed manner within a network architecture. Distributed UPF allows for the distribution of user data processing tasks across multiple instances of the UPF function deployed at different locations. Improving the overall efficiency of data processing by minimizing the distance data needs to travel, reducing latency, and optimizing resource utilization.

UPF reselection refers to changing a UE's UPF(s) seamlessly based on the current location. It can be used to continuously provide the optimal data path for UEs on the move for systems/applications relying on low-latency communication and/or MEC offload.

3GPP has defined Session and Service Continuity Modes (SSC) Modes 1, 2 and 3 for changing anchor UPF. SSC mode 3 enables seamless reselection of UPF anchor however it is optional for UEs to support and has a signalling overhead.

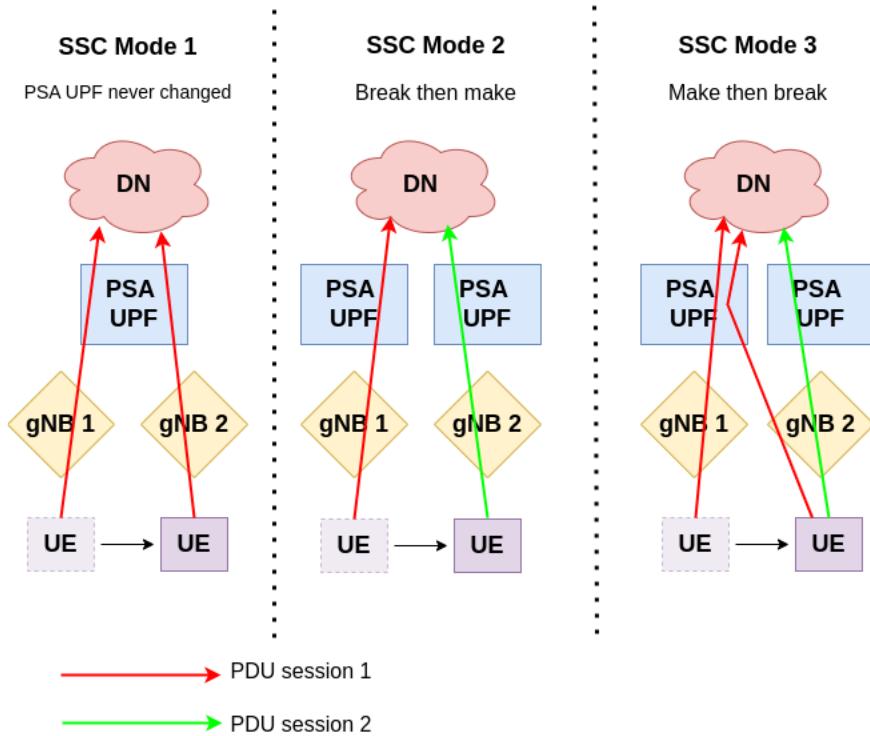


Figure 11: 3GPP UPF reselection modes

Raemis provides a solution for seamless UPF reselection without relying on UE's support for SSC mode 3. The solution relies on UE IP address allocation being handled by a central SMF or DHCP server and UE IP address is routable on N6 interface of all UPFs. This way, UE moves from gNB 1 to gNB 2 while sending uplink data with zero interruption in data stream.

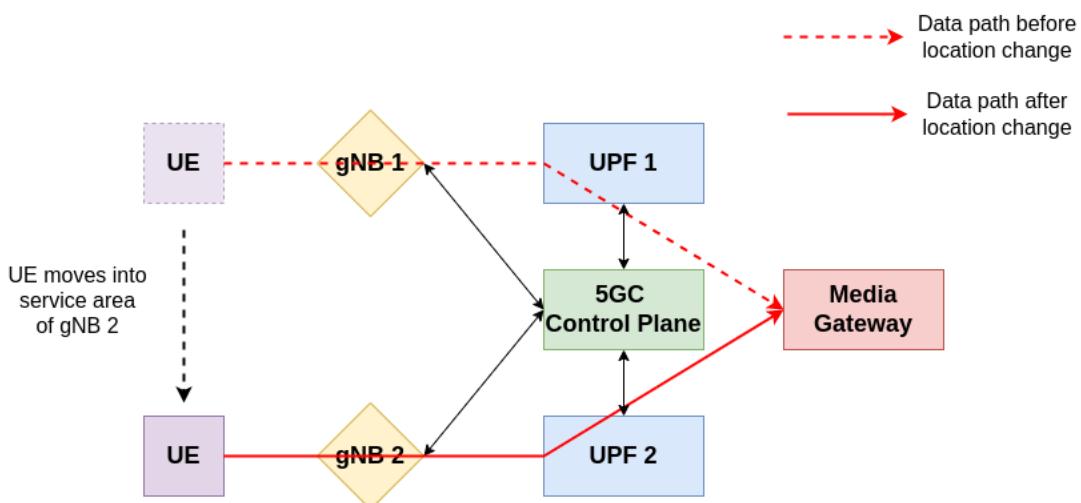


Figure 12: Raemis UPF reselection

#### 4.1.4 5G Slicing

5G slicing refers to a key architectural feature in 5G networks that allows the creation of multiple virtual, independent, and logically isolated networks, known as “slices,” within a single physical 5G infrastructure. Each slice can be customized to cater to specific service requirements, use cases, or customer needs, while sharing the same underlying 5G infrastructure efficiently.

Raemis administrator can create multiple Packet Data Networks (PDNs). PDN logical network can be associated with an enterprise VLAN (or the physical network port on the server or a VM) to provide Security & Traffic Separation, Load Balancing, and Configurable QoS.

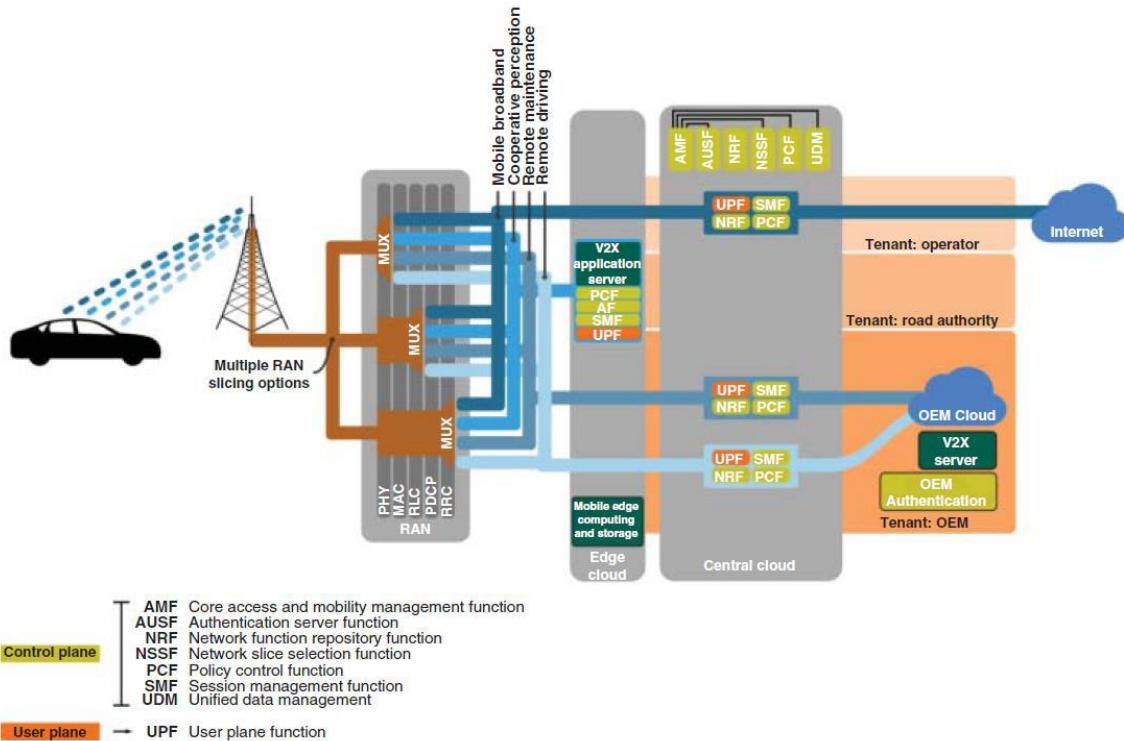


Figure 13: 5G Slicing flow of functions<sup>4</sup>

#### 4.1.5 Location Management Function

Location Management Function (LMF) is a crucial component in 5G networks, responsible for managing location-related functionalities and services for mobile devices. Its main role is to track and handle the mobility of user equipment (UE) as they move within the cellular network.

<sup>4</sup> M Fallgren et al, “Cellular V2X for Connected Automated Driving”, 2021

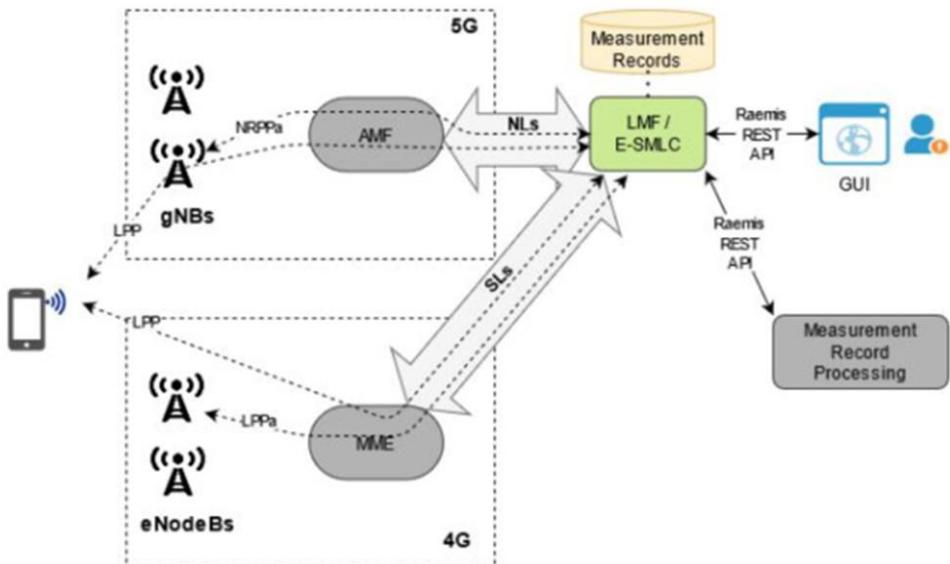


Figure 14: Location Management Function (LMF)

Main benefits include:

- Accurate Positioning: ensures that connected vehicles can accurately determine their geographical location and share this information with other vehicles and infrastructure. High precision positioning is critical for advanced driver assistance systems (ADAS), cooperative mobility applications, Autonomous Driving, Emergency Services and Traffic Management and Optimization.
- Contextual Information Sharing: With precise location data, safety applications like collision avoidance, blind-spot warnings, and intersection assistance can be enabled. Vehicles can exchange real-time position updates to help prevent accidents and ensure safe driving practices.
- Smart Navigation: The LMF allows for intelligent route planning and dynamic rerouting based on real-time traffic conditions. Connected vehicles can receive updated navigation instructions to avoid traffic jams, accidents, or road construction, leading to more efficient and stress-free journeys.

#### 4.1.6 C-V2X OBU

The hardware platform designed to meet the requirements of SUCCESS-6G-EXTEND use cases is primarily based on two latest generation modules specifically designed to address the latest advancements in C-V2X systems within the 5G NR environment. This OBU is one of the first Automotive Grade Compliant devices with 5G NR Sub-6 GHz capabilities, supporting both Stand Alone (SA) and Non-Stand Alone (NSA) modes.

The OBU is specifically designed for C-V2X vehicle communications, such as advanced driving safety, autonomous driving, Intelligent Transportation Systems (ITS), and Advanced Driver Assistance Systems (ADAS). Apart from that, it also provides critical security functions in C-V2X through its ARM processors, ECDSA cryptographic module for message verification, and HSM module for message signing. This way, the AP provides all the necessary elements for executing a C-V2X Stack, a C-V2X messaging software that manages, among other functions, the verification of received messages and secure signing of sent messages.

Thanks to this, the vehicle will be connected to the infrastructure, providing a low-latency channel to transmit the vehicle's data, ensuring a secure connection that guarantees the integrity and encryption of the data, as well as its robustness and efficiency. This innovation will be associated to all user stories.

#### 4.1.7 Dynamic 5G Core deployment and orchestration

The 5G Core may be deployed manually, or through the orchestrator. In SUCCESS-6G-EXTEND, the 5G core will be deployed as a service through NearbyOne, as part of the orchestrator's onboarded application in its Marketplace.

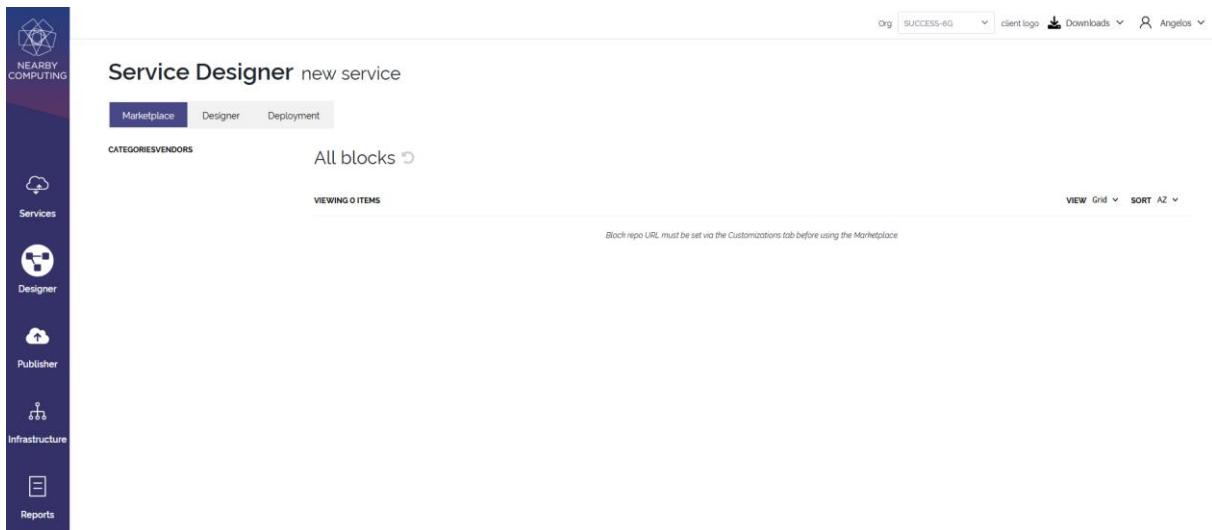


Figure 14: NearbyOne Marketplace for SUCCESS-6G-EXTEND subproject.

Figure 14 shows the NearbyOne Marketplace in the environment that has been created for SUCCESS-6G-EXTEND subproject. It is expected that the different 5G core elements (e.g., 5G core as a service, distributed UPF, etc.) will be onboarded in NearbyOne and appear as blocks in that section. In particular, the orchestrator has the ability to onboard the network functions provided by the network operator that are needed to enable access to the workloads to be deployed. 5G Core software components will be packaged into Nearby Blocks and will be onboarded on the platform. The conversion is made by encapsulating logic and code for the different application-specific functionalities and is created according to the defined policies. Nearby Blocks describe how to deploy the 5G Core, including several aspects such as:

- Rendering 5G Core configurations
- 5G Core placement across the registered clusters
- Number of Instances to be deployed.

The process of definition and packaging of the different components that are part of a certain block and the actual action of uploading the block into the NearbyOne platform is known as Block Onboarding. This setup enables the deployment of the 5G Core in any infrastructure that is orchestrated by NearbyOne, as well as the deployment of the distributed UPF in a different location (e.g., at the edge closer to the user).

#### 4.1.8 Closed-loop service orchestration

SUCCESS-6G-EXTEND foresees a closed-loop orchestration framework for automotive scenarios. Closed-loop orchestration is an advanced and dynamic process that involves a seamless integration of data collection (through monitoring), an analytics engine running AI algorithms, a decision engine, a

broker, and an automated orchestrator. This comprehensive framework operates in a continuous feedback loop, continually analysing, adapting, and automating actions based on real-time insights.

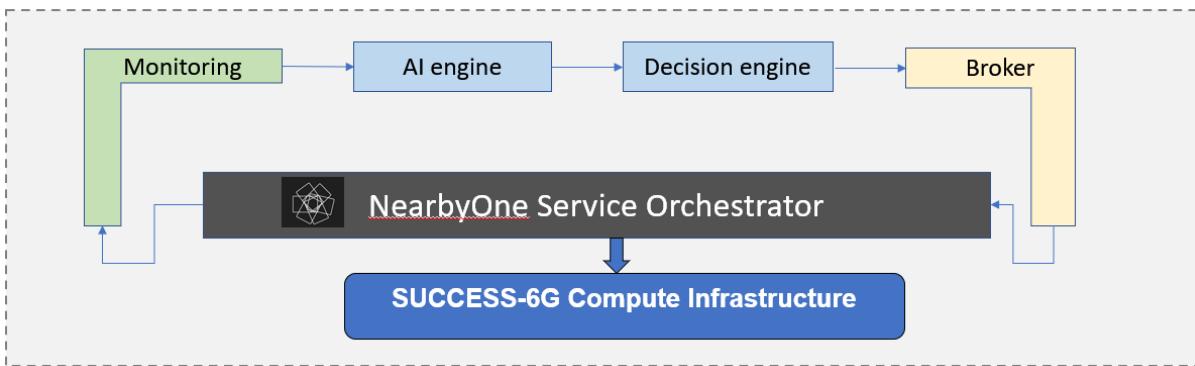


Figure 15: Closed-loop service orchestration in SUCCESS-6G-EXTEND project.

The above closed-loop process in the context of SUCCESS-6G-EXTEND is depicted in Figure 16. The foundation of closed-loop orchestration lies in the data collection phase, where diverse data types are acquired from various sources. This data includes network-related metrics, application-specific information, location-based data, and other relevant parameters, forming a rich and varied dataset to drive subsequent stages.

Once the data is collected, it undergoes rigorous analysis and processing in the analytics engine, leveraging powerful AI algorithms such as ML models, deep learning neural networks, anomaly detection, and predictive analytics. These algorithms derive valuable insights, detect patterns, predict trends, and identify potential issues or opportunities within the system.

The decision engine is the intelligence center of the closed-loop orchestration. It integrates the outputs and insights from the analytics engine, making informed judgments and decisions. These decisions involve fine-tuning system parameters, dynamically adjusting configurations, or triggering automated actions in response to changing conditions and data inputs.

The broker acts as an intermediate actor between the decision engine and the orchestrator. It receives the decisions from the decision engine and processes and translates them into actionable instructions for the orchestrator. The broker plays a crucial role in decoupling the decision-making process from the orchestration process, enabling more flexibility and adaptability in the overall system architecture.

The orchestrator is responsible for implementing the instructions received from the broker. It automates actions such as scaling up or down resources, dynamically reconfiguring the system, allocating resources efficiently, and initiating service migrations to optimize the system based on the decisions.

In SUCCESS-6G-EXTEND, the closed-loop orchestration process will ensure a self-regulating, adaptive, and efficient system that can respond in real-time to fluctuations in demand, changing environments, and evolving needs. By enabling automated decision-making and proactive system management, closed-loop orchestration will ensure optimal performance and is expected to enhance the user experience across various domains and applications.

## 4.2 Innovations that apply only to Use Case 1

### 4.2.1 Techniques driven by ML to assess, reconstruct and impute missing information

Related to the user story of use case 1 and mapped to WP3 activities, the following innovation is proposed:

- Data processing using ML techniques to assess and impute missing values.
- Data analysis for informed decision-making on the condition of the vehicle.
- Employ AI-powered solutions and knowledge rules for possible actions and actuator supervision.
- Leverage AI and ML to simplify, automate, and monitor the exploration of data.
- Ingest, stream and staging of condition monitoring data for forecasting the appearance of anomalies with predictive analysis and provide a complete dossier of quality.
- Development of AI-based techniques to accurately detect and predict failure of vehicle components and provide mechanisms based on AI that allow the updating of the autonomous over-the-air vehicles.

### 4.2.2 Imputation of incomplete vehicular measurement streams

Condition monitoring data come inadvertently with challenges which involve distortions and missing data due to i) the unreliable nature of the shared wireless medium, ii) hardware failures and iii) security incidents. In particular, the imperfections of the underlying communication infrastructure may result in connectivity outage and packet losses for consecutive time-steps [1]. On the other hand, the malfunction of hardware in-vehicle components (e.g., synchronization failures or errors in sensor readings) may result in persistent missing observations for one or multiple monitored features/variables. Finally, systematic modification of monitoring information and zero-injection measurements by adversarial actors may perniciously mislead the monitoring operation. Therefore, addressing the degradation of the received monitoring data is essential for high-fidelity estimation of the vehicular state and informed system control.

To overcome data incompleteness, an intuitive approach would be to simply discard the unobserved samples. While this method may work well with a limited number of incomplete samples, it may result in bias and loss of informative physical context in vehicular scenarios. To this end, a more practical approach to deal with missing values is imputation, where missing values are filled with one or a set of estimations. Conventional imputation methods, such as linear, cubic, or nearest neighbour interpolation, while computational-efficient, fail to incorporate cross-correlation relationships among the ambient measurement space [2]. Approaches based on singular value decomposition (SVD) are able to deduce linear correlations among measurement trajectories and, thus, reconstruct missing values in one data stream from the rest. Notably, by means of iterative low-rank decomposition and data imputation, missing values can be inferred [3]. Nevertheless, such factorizations do not account for temporal smoothness. It is to be noted that SVD-based schemes are characterized by an inherent inability to effectively address the existence of invariances of low-rank embeddings in the data. Furthermore, perils which deteriorate their performance arise in the presence of transient content among the measurement channels [4]. To this end, in SUCCESS-6G, we aim to leverage dynamical systems as the formal machinery for addressing the data imputation problem in the presence of non-linear and multi-scale spatio-temporal behaviour of sensor trajectories in vehicular setups. Dynamical systems offer an interpretable mathematical framework to i) learn the hidden patterns of time-series sensor data with high spatio-temporal correlation, and ii) mine their underlying dynamics to gain insight into the evolution of the process being monitored. As such, this approach provides an effective means to obtain accurate estimates of incomplete sensor streams whose missing values can be attributed to imperfect connectivity, hardware malfunctions, and security attacks.

The aforementioned innovation mainly applies to the user story of use case 1 and it is mapped to WP3 activities.

#### **4.2.3 End-to-end condition monitoring, failure identification, and visualization for V2X systems**

In SUCCESS-6G-EXTEND, an open-source monitoring software solution for V2X predictive diagnostics is expected to be developed. This modular and containerized end-to-end solution will provide actionable insights for the real-time performance of vehicular condition monitoring with the aid of user-friendly customized dashboards. In particular, the key building blocks of the solution will be: i) Generator, a Python script sending rows from the vehicular dataset to a collector using the HTTP POST method, imitating the communication between sensors and the fusion center; ii) Collector, a RESTful application program interface implemented in Python Flask web framework used to authenticate connecting clients and validate received data; iii) Storage, a module including databases and applications for data storage (database and queue) and visualization; iv) Models, a module representing a trained model currently used for classification of events; v) Model builders, a framework for tracking of the model experiments. The solution will also employ highly customized dashboards for knowledge extraction, which support tailored queries and provide a wide range of charting capabilities (e.g., trajectory graphs and trend maps) for analysing and presenting vehicular monitoring information [7] [8]. The solution is currently implemented in Docker containers and will be publicly available on GitHub.

The aforementioned innovation applies to the user story of use case 1 and it is mapped to WP3 and WP4 activities.

### **4.3 Innovation that applies only to Use Case 2**

#### **4.3.1 Location-aware SDN controller and Service Orchestrator**

The Location-Aware Software-Defined Networking (SDN) Controller and Service Orchestrator is an innovative solution designed to revolutionize network management and service provisioning in modern data centers and communication infrastructures. This cutting-edge technology seamlessly integrates software-defined networking with intelligent service orchestration capabilities, creating a highly efficient and dynamic network environment.

Some of its key features to be exploited in SUCCESS-6G-EXTEND are:

- Software-Defined Networking (SDN) Integration: The solution incorporates an advanced SDN controller that centralizes the network control plane, enabling administrators to dynamically manage and configure network resources, policies, and services through a unified, programmable interface.
- Real-Time Location Awareness: One of the defining features of this innovation is its ability to harness real-time location data. By integrating with location-aware devices and sensors, the SDN controller can identify the physical location of connected network devices, end-users, or IoT devices with remarkable precision.
- Geographically Optimized Routing: Leveraging the location information, the SDN controller and service orchestrator can make intelligent routing decisions based on the physical proximity of network elements. This allows for efficient data transmission, reduced latency, and improved overall network performance.
- Dynamic Service Orchestration: The service orchestrator component of this innovation can dynamically provision and manage services based on location and network conditions. It enables automatic scaling of resources, load balancing, and failover mechanisms to ensure optimal service delivery.

- Context-Aware Service Deployment: With location-awareness and real-time data, the SDN controller can intelligently deploy services or allocate resources according to the specific needs of users or devices in different locations. This level of context-awareness enhances the overall user experience and resource utilization.
- Enhanced Network Security: Location-based access control and security policies can be enforced, allowing the SDN controller to detect and respond to potential security threats in a timely manner. Unauthorized access attempts or anomalies in device behaviour can trigger immediate actions to safeguard the network.
- Analytics and Insights: The location-aware SDN controller and service orchestrator also come equipped with powerful analytics tools that provide valuable insights into network performance, user behaviour, and resource utilization. These insights can be leveraged to optimize network design and resource allocation over time.

## 5 Use case facilities

For the implementation and the validation of SUCCESS-6G-EXTEND innovative solutions, a number of facilities and assets available to the project partners will be employed. A summary of the key use case assets will be described next, whereas a more detailed specification of the use case infrastructure and experimental setups will be produced as the project progresses, and within the scope of WP3, WP4 and WP5 outputs.

### 5.1 Facilities for both Use Cases

#### 5.1.1 CELLNEX Mobility Lab

The CELLNEX Mobility Lab, located at the Circuit Parcmotor Castellolí near Barcelona (Spain), is a pioneering and innovative test space for the development of ITS technological solutions associated with 5G, sustainable mobility and autonomous vehicles. The circuit has been equipped with C-V2X, 5G and Edge Computing technologies and a private wireless network with coverage throughout the venue.

Furthermore, the Mobility Lab provides a GPS reference station that provides positioning measurements with errors under 5 centimetres, that is mandatory to address driving safety services.

Thus, the CELLNEX Mobility Lab supports the development of future mobility services and infrastructures through the assessment of different trials and Proofs of Concept in a well-controlled field scenario, prior to the deployment on the final mobility scenarios. Smart Connectivity offered in the Mobility Lab makes possible vehicle-to-vehicle (V2V), Vehicle-to-Infrastructure (V2I), Vehicle-to-Network (V2N) and Vehicle-to-People (V2P) communications, setting the scene for future mobility services for vehicles, cities, roads and motorways.

The CELLNEX Mobility Lab is based on green infrastructures, that operate under the premise of efficient energy management and environmental sustainability, since most of them are self-sustainable sites that use eolic and/or solar energy. Besides, future road deployments will follow same premises, as most of the roads are located in isolated areas with few possibilities to connect to the grid power.

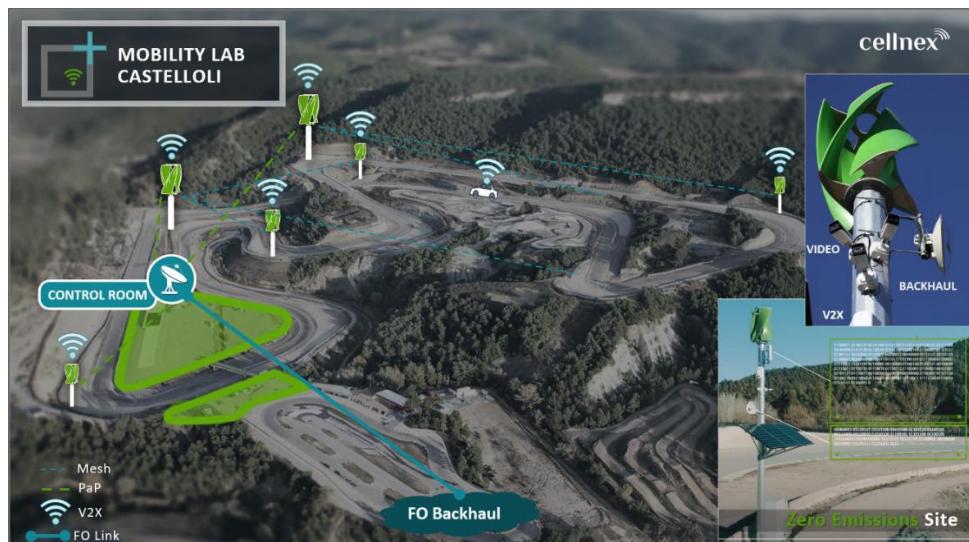


Figure 17: CELLNEX Mobility Lab (Castellolí)

Regarding communication infrastructures, the Cellnex Mobility Lab in Castellolí has a 5G private network which is composed by a 5G SA Core (Druid solution) and several 5G New Radios (Sunwave solution).

All the infrastructure deployed in the Cellnex Mobility Lab in Castellolí is supervised and monitored

from the Cellnex NOC (Network Operation Center), assuring the SLA and an efficient response time to resolve any incident that affects the Mobility Lab reliability.

Main parts of the Connectivity Infrastructure available in the Cellnex Mobility Lab are the “Core” Infrastructure located at the Control Room, and the “Edge” infrastructure located in different site nodes to cover all the circuit.

Thus, the Mobility Lab is composed by:

- 1 Grid Site, connected to the power supply
- 1 Hybrid Node, connected to the power supply and eolic/solar energy
- 7 Green Nodes (Zero Emissions Site), only connected to eolic/solar energy

The Green Sites are linked in a mesh network using mmW Radio Links at 60GHz that offer a bit rate of 1,2Gbps and grant a good performance in terms of capacity and reliability for the access network.

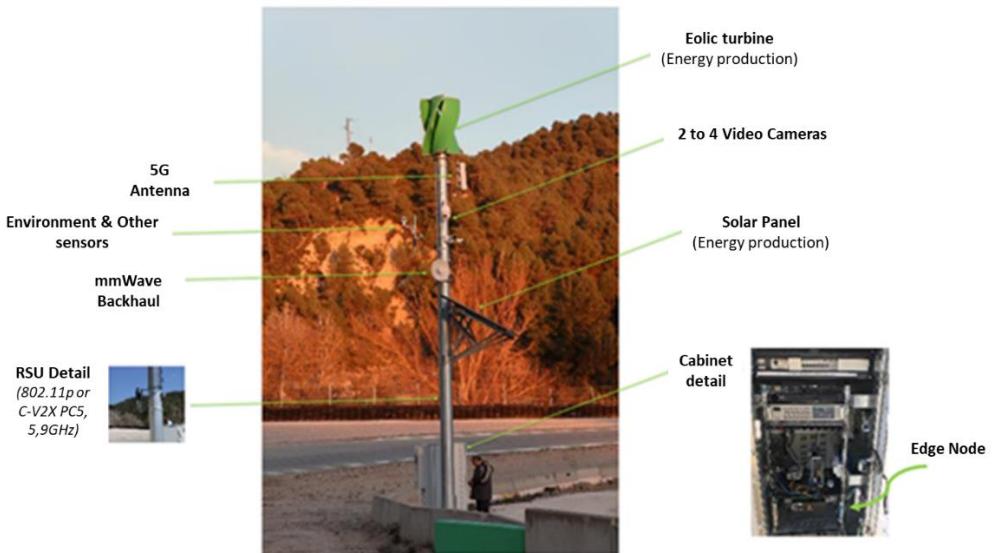


Figure 18: Cellnex Mobility Lab - Green Nodes

**Green Nodes** are self-sustainable, and all the consumed energy is produced by their solar panels and wind turbines. Advanced algorithms for energy management and dashboards for monitoring the energy consumption of each device connected to the node (cameras, UI, servers, etc) are also implemented to enhance the management of this kind of sites. Besides, thanks to the IoT sensors, is possible to monitor environmental and atmospheric parameters, and forecast future conditions using AI tools and the information gathered by the sensors network. If the AI system predicts that the weather conditions aren't good enough to support the energy load of the green node, then the main services are transferred to the Grid Site or the Hybrid one until the energy performance of the Green node can support again all the workload. Thus, the efficient edge infrastructure ensures the continuity of essential services that are provided in the Mobility Lab.

The **Grid Site** and the **Hybrid** one are connected to the power supply system. In addition, these nodes are also connected to the FO network.

The Hybrid node works with eolic & solar energy, which also has an energy storage system to save the surplus energy from the renewable energy sources. Besides, it is complemented with grid power supply in case the energy demand can't be supplied by the green or the stored energy, enhancing the reliability of the site communications infrastructure.

The Grid Site has also a mini-datacenter at its base, that hosts several servers submerged in liquid. This special datacenter can manage services and applications that migrate from the Green Sites to safe energy.

## Operation and restrictions

In order to deploy the Use Cases, Cellnex will manage the access to the Mobility Lab and its ICT infrastructure.

The ICT infrastructure could be accessible either locally from the Cellnex Control Room in the Mobility Lab, or in remote by using a VPN connection. Cellnex will coordinate the dates for experiments, since there could be other trials or projects running in the Cellnex Mobility Lab.

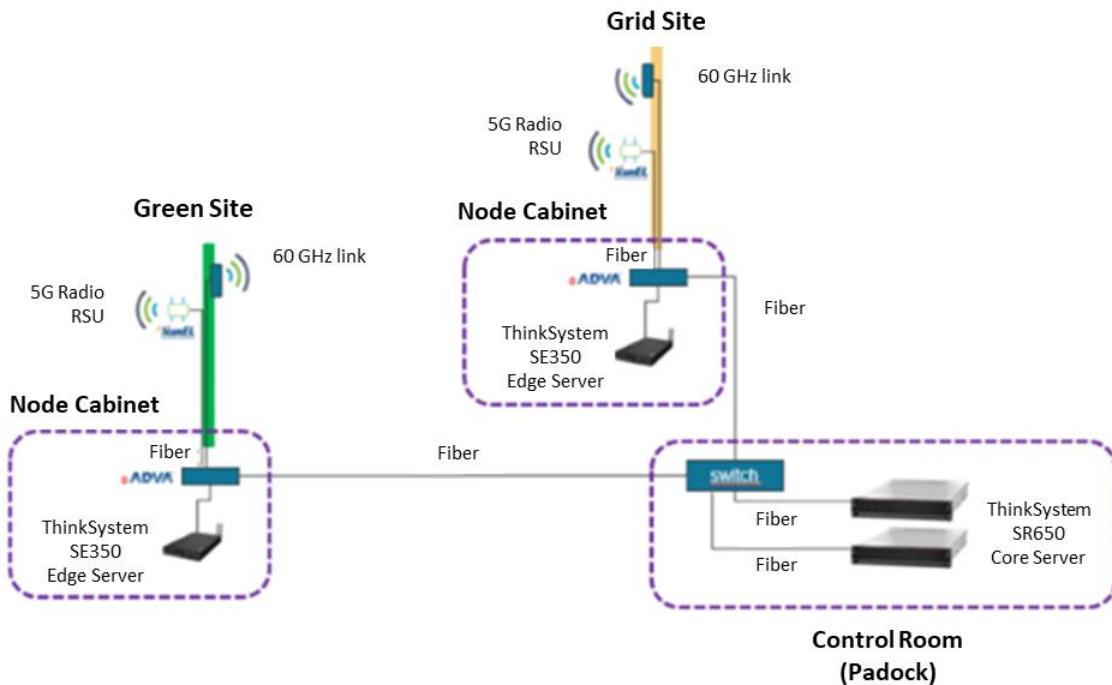


Figure 19: Cellnex Mobility Lab - ICT Architecture

- **Control Room – ICT Infrastructure:**

The ICT infrastructure hosted in the Control Room is composed by 2 servers, Lenovo ThinkSystem SR650. One server contains the 5G Core SA (Druid solution) and the other contains the MANO (that is the NearByOne solution of Nearby Computing discussed in Section 4).

The Lenovo ThinkSystem SR650 server provides support for data analytics, hybrid cloud, hyperconverged infrastructure, video surveillance, high performance computing and much more.

Intel® Optane™ DC Persistent Memory delivers a new, flexible tier of memory designed specifically for data center workloads that offer an unprecedented combination of high capacity, affordability, and persistence. This technology will have a significant impact on real-world data center operations: reduction of restart times from minutes down to seconds, 1.2x virtual machine density, dramatically improved data replication with 14x lower latency and 14x higher IOPS, and greater security for persistent data built into hardware.

- **Node Cabinet – ICT Infrastructure:**

Each node cabinet hosts one Edge Server, Lenovo ThinkSystem SE350, that will contain the services of the Use Case. These services will run over dockers and containers, that are orchestrated by the NearByOne Edge Orchestrator solution of Nearby Computing, as discussed in Section 4.

Besides, if it is needed to use the racetrack, Cellnex will also manage the required access to run the experiments.

### 5.1.2 5G Stand Alone mobile network

The 5G Stand Alone mobile network is based on a Raemis™ Druid SW solution, which is a 3GPP compliant 5G core, RestAPI and additional functionality. The Core Solution is complemented with a Sunwave RAN solution for the 5G-NR side.

#### 5G SA Core Solution

The Raemis™ technology platform implements all the 3GPP 5G components and features. It includes a private network with private subscribers, private cell network, mobility Xn handover, unknown subscriber rejection, idle mode cell reselection, UE attachment/implicit detach/re-attach and VoNR calls/data service.

The Raemis™ Druid solution is radio agnostic, simple to use, easy to integrate and easy to scale up & down. It also exposes a powerful RESTful API that enables application developers to build on top of Raemis™ or integrate external applications with the Raemis™ platform.

Raemis™ 5G platform supports distributed architectures which can be deployed in cloud native environments with central management of multiple edge sites. The solution is designed to enable advanced demonstration of 5G SA early features, allowing to define, assess and prepare innovative 5G solutions before launching new communication services to the market.

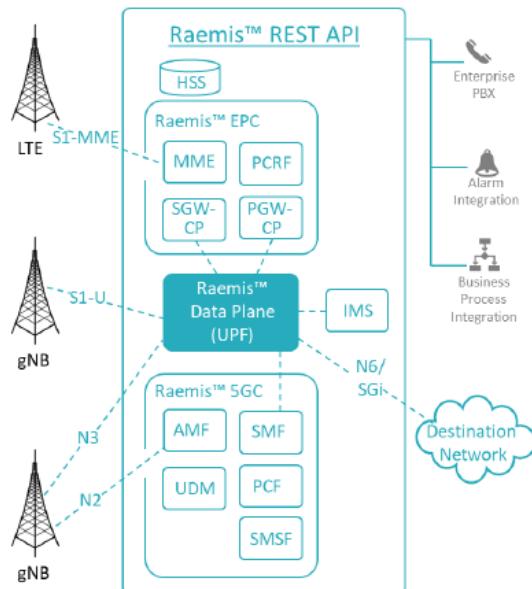


Figure 20: Raemis™ Druid Core Solution - 5G SA Network

Main features of the 5G SA solution are:

- Private Core Network Dashboard
- Enhanced integration with “enterprise LANs”, allowing Enterprise Slicing functionalities
- 5G-SA capabilities and 5G URLLC features
- Location Management Function (LMF)
- 5G Radio Network Slicing: Configuration of Radio QoS and Radio Congestion Control per

network

- Real-time System Monitoring
- 5G-LAN (non-IP) communication between 5G end devices
- Group Management and Network Management
- PBX Integration
- Cells Management with ACS Integration System Management
- Alarm Monitoring, Troubleshooting and Emergency Call
- User Equipment IP address assignment using DHCP
- Up to 20 subscribers (with 20 SIM cards)

The Raemis™ solution supports Security and Traffic separation, Load Balancing and Configurable QoS. The administrator tool can create multiple Packet Data Networks over the same infrastructure. Each PDN logical network can be associated with an enterprise VLAN, setting different performance service parameters for everyone.

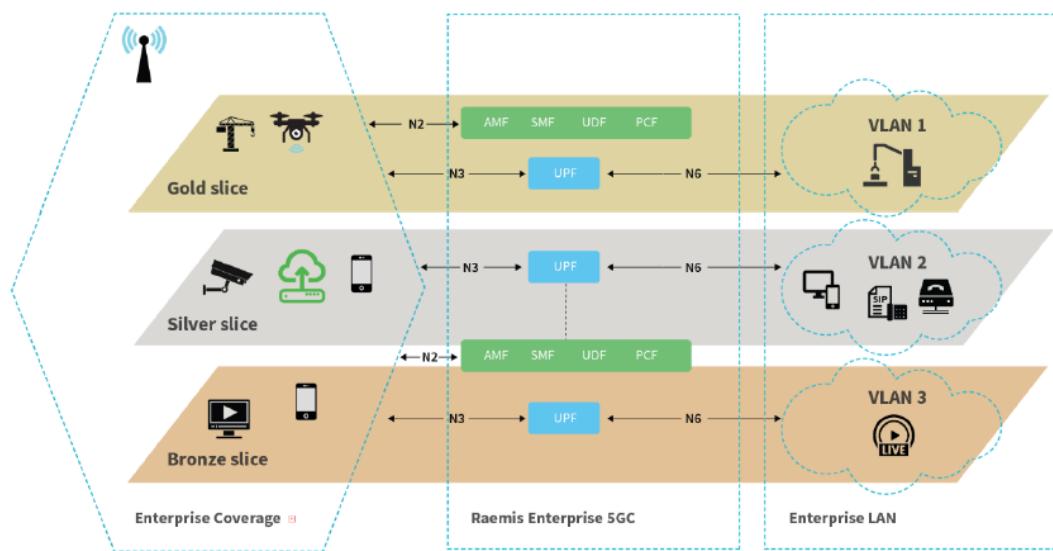


Figure 21: Network Slicing

PDNs enable the following functions:

- Security and Traffic Separation: users can be organised in logical groups and assigned to the PDN that best suited to support the group needs.
- Load balancing: for performance reasons and to avoid traffic bottlenecks, different PDNs can be used to spread the network traffic load across the different “enterprise VLANs”.
- QoS allocation: It is possible to create PDNs that provide different QoS levels on the 3GPP network and easily control user access to those PDNs.

The Dashboard panel provides a comprehensive summary of the overall status of the system. It is the main area for monitoring user activity and system resources. The information updates every five seconds by default. The Dashboard panel has four sections that provide information about:

- User Status.
- Cells Status.
- Network Status.
- Miscellaneous Information.

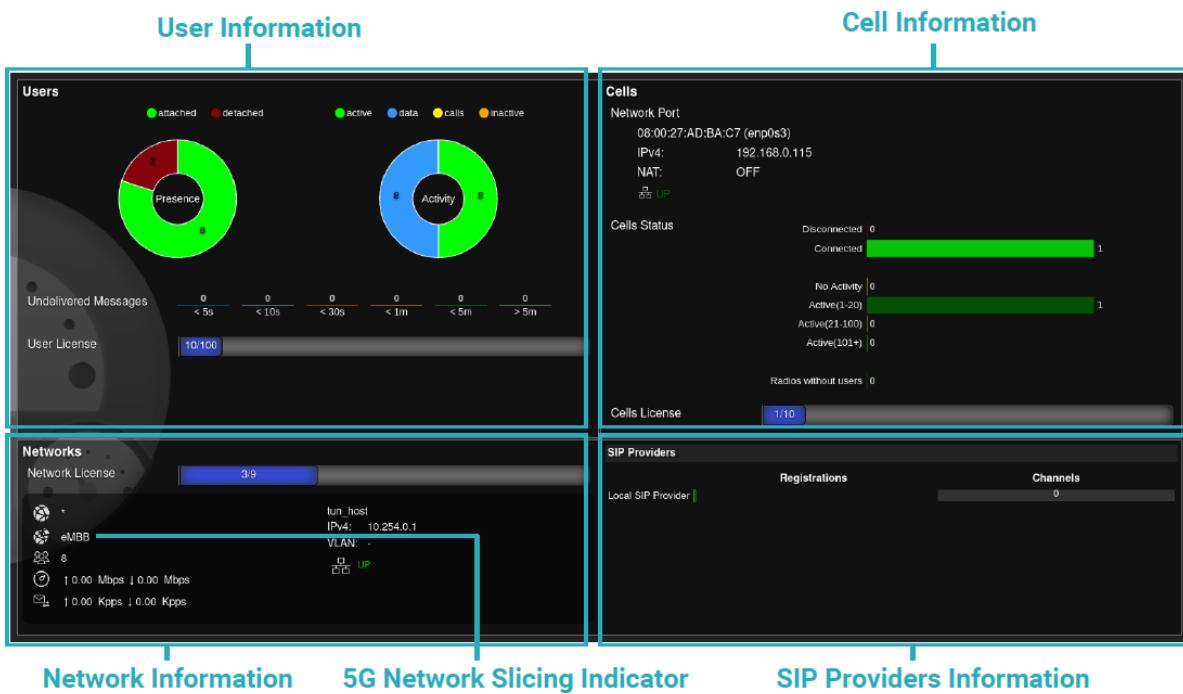


Figure 22: Dashboard panel.

For 5G systems, there is very little difference from 4G systems. 5G subscribers are accounted for in the Users area and 5G cells are accounted for in the Cells area. In addition, there is a 5G Network Slicing indicator in the Network Information area.

The Cells area of the Dashboard provides a summary view of more detailed information presented in the Cells panel.

The availability of service depends on the network connection from Raemis to the radios and whether the radios are operational. The Cells area identifies which network interface services the radios. In simple terms, the IP address of the Mobility Management Engine (MME) configured in the radios must match the IP address of the network device shown in this panel.

If the network is UP, the cell status shows the number of eNodeB devices connected.

The Radios without Users indicator can highlight possible issues with the radios. For example, a radio with no users, may indicate:

- A normal situation because the system does not expect users in the area at a particular time of day.
- An under-used radio device providing coverage in an area that is not frequently used.
- An issue with a radio that is not transmitting or that UEs cannot see.

## 5G-NR solution

The Cellnex Mobility Lab in Castelloli has a Sunwave solution for the 5G-NR side, with distributed BBU and RRU.

The **BBU nCELL-T5000** is used to realize 5G NR base station processing unit, centrally control and manage the entire base station system, realize direct access and data interaction with 5G core network, realize NGAP, XnAP interface, and realize 5G NR access network protocol stack function, RRC, PDCP, SDAP, RLC, MAC and PHY protocol layer functions, baseband processing functions.

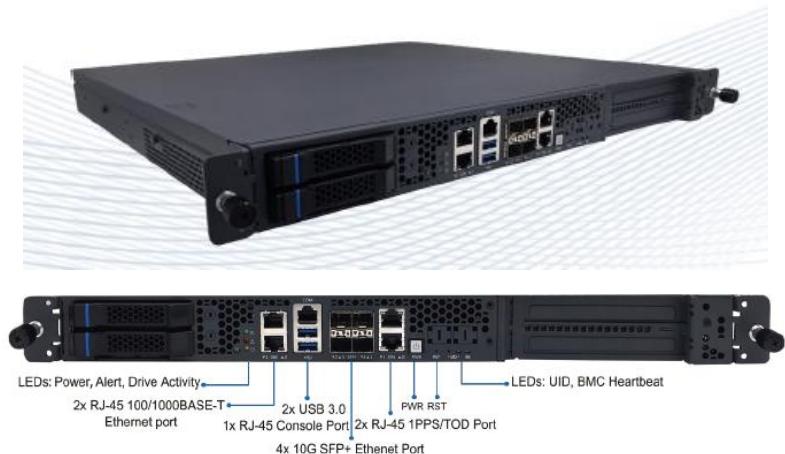


Figure 23: 5G-NR Sunwave BBU - nCELL-T5000

Main functional features are:

- Standard 3GPP Rel.15
- Server platform Xeon D-2177NT Processor
- Maximum number of cells: 4
- Maximum number of carriers: 1
- Carrier bandwidth: 100 MHz
- Subcarrier spacing: 30KHz
- Number of active users: up to 400 users
- Downlink peak rate: 1,5 Gbps
- Uplink peak rate: 260Mbps
- Max number of data streams: 4 DL / 2 UL
- Number of concurrently scheduled users: 4 users / slot
- Duplex mode: TDD, FDD
- BS spatial layers: 4
- UE spatial layers: 2
- Fronthaul bandwidth: 10G

The BBU unit is complemented with a FGAF Acceleration Card that uses Xilinx's Zynq Ultra Scale+ MPSoC and Kintex Ultra Scale+ FPGA to realize the functions of baseband processing acceleration and data forwarding, and meets the application requirements of high bandwidth, low latency and multi-cell deployment required by the 5G BBU system. Very high integration and ease of use. This card is a single-slot, full-height half-length (FHH) card, using PCIeGen3x16 interface (supports bifurcation into two sets of Gen3x8 interfaces) to connect to the system, and externally supports 4 SFP+ optical ports. The card is equipped with a high-precision clock source and clock phase-lock circuit, supports external 1588V2 and GPS input, and can provide stable clock synchronization services to the next-level network node through the SFP+ fronthaul interface.

The **RRU RU4370** is a digital transport platform supporting cellular technologies on fibre optic cable using the CPRI protocol. The power amplifier technology adopts DPD (Digital Pre-Distortion), allowing for a significant improvement in power consumption compared with analogue technology.



Figure 24: 5G-NR Sunwave RRU - RU4370

Main features of this component are:

- 5G NR compliant
- Supports 4T4R digital radios
- Up to 5W (37dBm) Output Power and up to 100MHz IBW
- Supports cascading
- Supports Sub-6GHz TDD and External Alarm
- Digital bandwidth per channel (DL & UL): 20/40/50/60/80/100 MHz
- Band Frequency: 3500 MHz (UL & DL Freq: 3800-4100)
- 3GPP band: N77
- Complies with 3GPP TS36.106, 3GPP TS25.106

### 5.1.3 Mobile Edge Computing infrastructure

Main components of the Mobile Edge Computing infrastructure are the Lenovo ThinkSystem SE350 Edge Servers, located at every Cabinet node.

These servers will manage the dockerized services and containers of the Use Case, which are orchestrated by the NearByOne Edge Orchestrator solution of NearbyComputing, as discussed in Section 4.

The Service Docker will provide the V2X services of each use case, and the Core Docker will manage the different containers for the network communication services like VDU, vCU-CP, vCU-UP, etc.

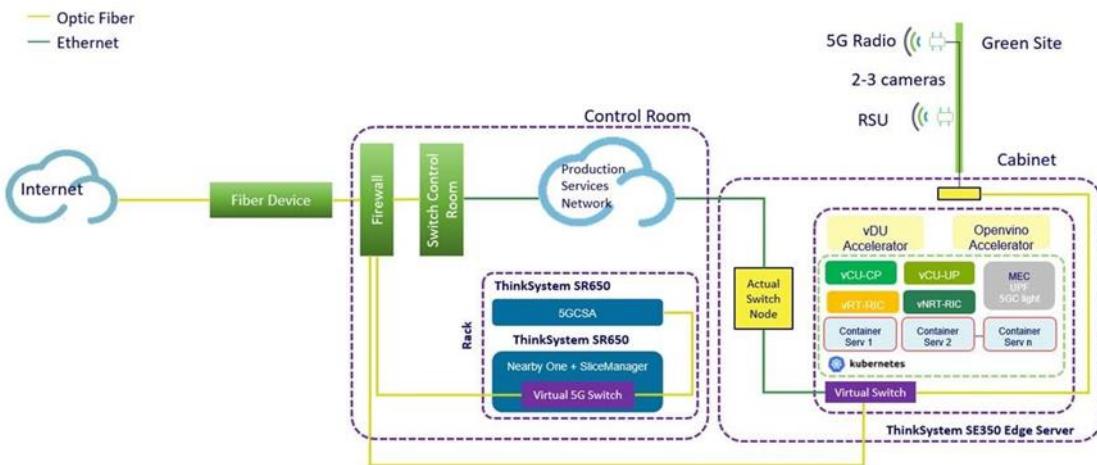


Figure 25: Cellnex Mobility Lab - ICT Infrastructure

The ThinkSystem SE350 is an Intel® Xeon® D processor-based server, with a 1U height, half width and short depth case that can go anywhere. Mount it on a wall, stack it on a shelf or install it in a rack. This rugged Edge server can handle anything from 0-55°C as well as full performance in high dust and vibration environments.

The ThinkSystem SE350 is designed and built with the unique requirements for Edge servers in mind, it is versatile enough to stretch the limitations of server locations, providing a variety of connectivity and security options and easily managed with Lenovo XClarity Controller. The ThinkSystem SE350 is a rugged compact-sized Edge solution with a focus on smart connectivity, business security, and manageability for the harsh environment.

#### 5.1.4 MEC orchestrator and MEC platform

The MEC Orchestration is based on NearbyOne, an orchestration solution developed by Nearby Computing. NearbyOne provides a zero-touch orchestration framework for lifecycle management of application and edge resources. This includes the use of AI algorithms with the objective of providing closed-loop autonomy and zero-touch reconfiguration at all layers of the edge infrastructure. The MEC platform is a cloud-native platform (e.g., a Kubernetes cluster) to host network functions and MEC applications or V2X services.

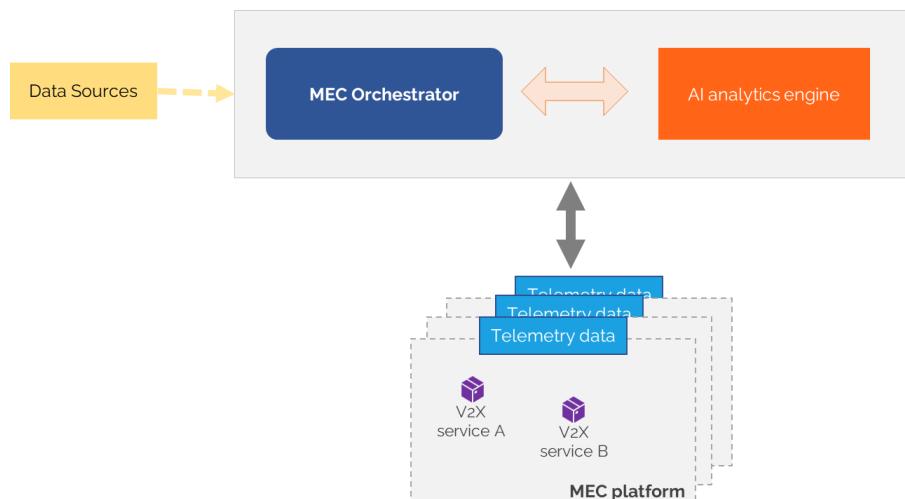


Figure 26: MEC orchestrator and MEC platform.

The main elements considered in this layer are shown in Figure 27 and detailed below:

- The **MEC orchestrator**, guided by the AI/optimization analytics, executes decisions pertaining to application placement or migration within the edge infrastructure.
- The **AI analytics engine** module analyses the collected telemetry data (and/or any other source of relevant data) and provide decisions or suggestions to the orchestrator.
- The **MEC platform(s)** (edge nodes), are the geographically distributed computing resources, where the applications are deployed. As an example, each edge node can consist of a Kubernetes cluster.
- The **data sources** are the custom target QoS/QoE objectives of the AI analytics engine and the MEC orchestrator.
- The **telemetry data**, including various live metrics of interest from the platform and applications, which may encompass factors such as energy availability, latency, or end-user location, among others.
- The **V2X services** are the end-user orchestrated MEC applications (vehicular condition monitoring services).

### 5.1.5 C-V2X infrastructure

Main components of the C-V2X infrastructure deployed in the Cellnex Mobility Lab in Castelloli are the RSU (Road Side Units) devices, based on the Lacroix Neavia V2I Stations or similar.



Figure 28: C-V2X RSU

Neavia v2i Station is the V2X solution for connected roads and autonomous vehicle applications. Neavia v2i station operates on 5.8 / 5.9GHz bands according to US or European standards (WAVE 1609 / EN 302 571). The unit is designed to ensure permanent and rugged use along the roads, while ensuring technological scalability. A wide range of interfaces is available to communicate with sensors for advanced vehicle perception and existing traffic lights. The embedded software includes a Web HMI and API, as well as all application/communication stacks required to communicate with the vehicles and the traffic management centres. It is compliant with C-ITS corridors, providing 802.11p DSRC and C-V2X PC5 communication.

### 5.1.6 C-V2X OBU

The C-V2X OBU based on two latest generation modules specifically designed to address the latest advancements in C-V2X systems within the 5G NR environment, specifically Release 15.

The first module is a Network Access Device (NAD), specifically the Quectel AG550. This module is one of the first Automotive Grade Compliant modules with 5G NR Sub-6 GHz capabilities, supporting both Stand Alone (SA) and Non-Stand Alone (NSA) modes. Adopting 3GPP Release 15 technology, the module supports a maximum download speed of 2.4 Gbps and an upload speed of 550 Mbps (in NSA mode). It is compatible with previous 3GPP releases, including 4G LTE-A. It supports C-V2X PC5 for direct vehicle-to-infrastructure communications.

The second main module is the Application Processor (AP), which has a high-speed connection to the NAD. It is the Quectel AG215 module, an automotive-grade AP specifically designed for C-V2X vehicle communications.

Regarding the GNSS module which is embedded within the NAD AG550. This GNSS module is capable of processing signals from GPS, GLONASS, BEIDOU, Galileo, and QZSS constellations. It operates in the L1/L2/L5 frequency bands. Additionally, the modem ensures compatibility with previous technologies such as GSM, UMTS, and LTE-A.

The main characteristics of the OBU (Vmax) which will be deployed in the vehicles are:

- NAD (Network Access Device) module 5G NR (New Radio) 3GPP Release 15
  - C-V2X Sidelink (PC5 Mode 4) features
  - Frequency Range 1 (FR1)
  - Uplink and Downlink greater than 500 Mbps
  - Degree of automotive
- AP (Application Processor) C-V2X module + Hardware Security Module (HSM)
  - 1.4 GHz Dual-Core Cortex-A53
  - LPDDR2 512 MByte
  - Flash 512 MByte (available 190MB) for SO
  - External flash eMMC 8GByte as expansion capacity
  - Signing of C-V2X messages to be sent using an associated HSM
  - Internal HSM to the AP module (ECDSA) up to 2500TPS through CPU
  - External HSM to the AP module
- GNSS positioning receiver
  - Multi-constellation and multiband.
  - Update rate greater than or equal to 10 Hz.
  - Supported input and/or output formats: NMEA1803, RTCM2, RTCM3, or equivalent.
  - RTK and Dead Reckoning functionalities
- Power management and intrusion detection microcontroller
  - Low power consumption
  - Active during system "sleep" mode
  - With backup battery
  - Firmware erasure system in case of intrusion
- CAN and Ethernet communication ports for communication with other vehicle systems
- Critical communication lines on the printed circuit board
  - Identification and routing of critical lines on internal layers
  - Identification of access points and definition of elimination or contingency procedures in case of commercial hardware versions.
- Mechanical characteristics:
  - 166 x 101 mm (without connectors and fixing points).
  - Sealing grade: IP52
  - Thermal strategy: Conductions through metallic bracket and air convection

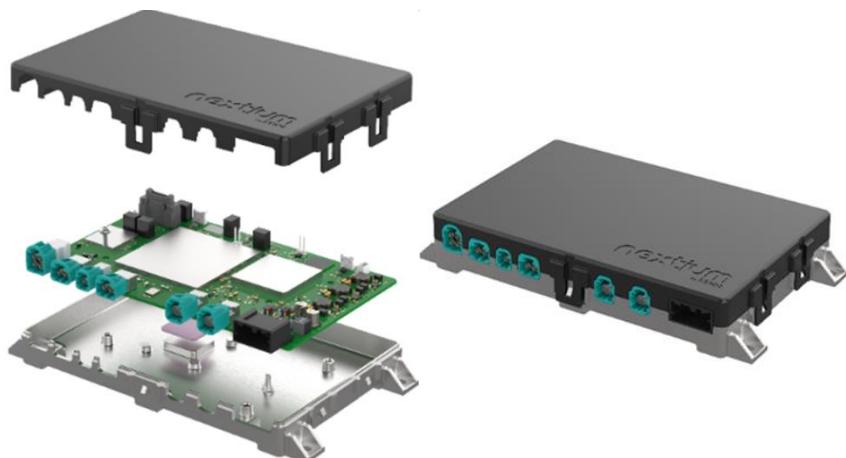


Figure 29: C-V2X OBU for a vehicular predictive maintenance service.

## 5.2 Facilities for Use Case 1

### 5.2.1 SUPERCOM platform

The Sustainable and High-Performance Computing (SUPERCOM) platform<sup>5</sup> is owned and maintained by the Sustainable Artificial Intelligence (SAI) research unit at CTTC and comprises central, edge and on-device computing engines, SUPERCOM is controlled via ad hoc-designed software for multiple data-processing and mining tools, spanning from real data collection and generation, data cleaning, pre-processing and visualization to model building, results analysis, and informed decision-making. The different innovations developed in the context of SUCCESS-6G-EXTEND.

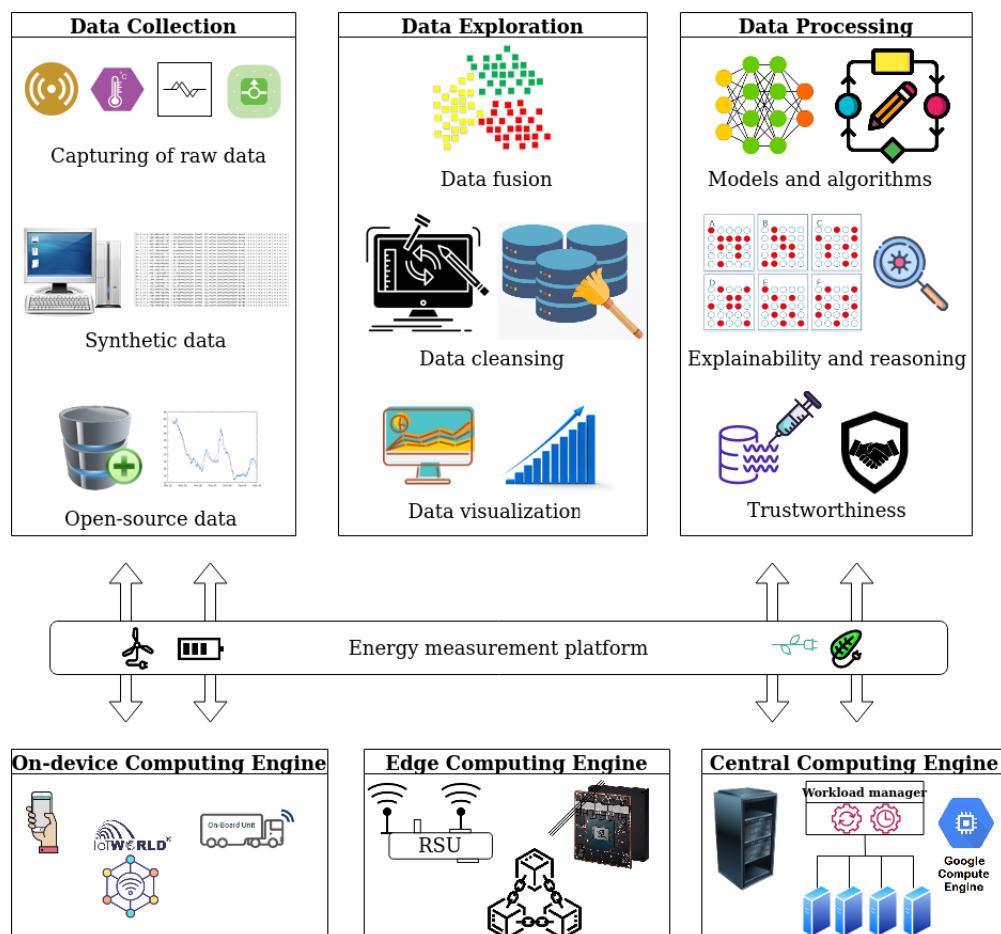


Figure 30: Building blocks of SUPERCOM platform.

Figure 31 demonstrates the key building blocks of SUPERCOM.

## 5.3 Facilities for Use Case 2

### 5.3.1 ADRENALINE Testbed

The ADRENALINE testbed<sup>®</sup> is an open and disaggregated SDN/NFV-enabled packet/optical transport network and edge/cloud computing infrastructure for Beyond 5G, 6G and IoT/V2X services. It embraces several network segments such as access, metro, and core. The key elements include (1)

<sup>5</sup> <https://supercom.cttc.es/>

SDN-enabled partially disaggregated optical network. It is composed of: i) 1 photonic (flexi-grid DWDM) mesh network (PMN) with 4 nodes (2 ROADM nodes & 2 OXCs) and 5 bidirectional DWDM amplified optical links up to 150 km (overall 600 km of optical fibre); ii) a Spatial Division Multiplexing (SDM) domain formed by 2 Spatial Cross Connect devices (SXC) connected by a 19-core 25Km multi core fibre (MCF); iii) a pair of packet optical nodes with optical pluggable transponders providing aggregated 400G data rates for transporting traffic flows between the access and the core network segments; iv) heterogeneous access network technologies are connected to the metro infrastructure such as IP Cell Site Gateways (CSGs) equipped with Edge DC capacities, a Passive Optical Network (PON) tree formed by disaggregated Optical Network Terminals (ONTs) offering connectivity to several Customer Premises Equipment (CPEs), and a pool of (OpenFlow-based) packet switches domain deployed on COTS and using Open vSwitch (OvS) for the network connectivity needed by several Edge/Core DC nodes; v) optical metro nodes are also connected to programmable SDN-enabled Sliceable Bandwidth Variable Transponders (S-BVTs) to transmit multiple flows at variable data rate/reach up to 1 Tb/s.

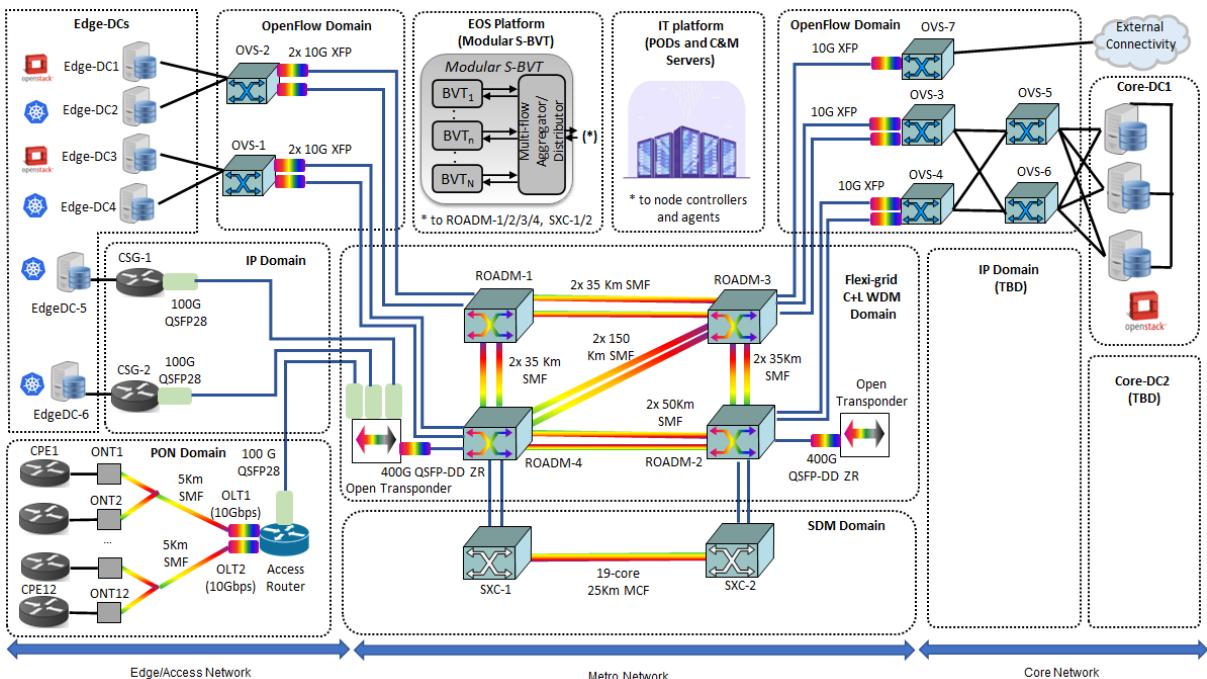


Figure 29: CTTC Adrenaline Testbed

The different domains access (i.e., PON, IP CSGs, OpenFlow) and metro (i.e., Flexi-grid DWDM and SDM) are managed by dedicated orchestrators/controllers (e.g., Optical Line System SDN controller or OpenDayLight) to automatically handle the connectivity services entailing the de-/allocation of heterogeneous network resources (i.e., packet and optical devices). Those domain-specific controllers and orchestrators are coordinated hierarchically by implementing the ETSI TeraFlowSDN controller. The TeraFlowSDN controller exposes a NorthBound Interface to allow an external system (e.g., NFV service platform) to request network connectivity services. This NFV service platform orchestrates the transport (optical/packet) and computing (edge/cloud) resources: i) Multi-VIM (virtualized infrastructure managers) combining OpenStack and K8s controllers for virtual machines and containers; ii) TeraFlowSDN controller for end-to-end connectivity among virtual machines, containers, and end-points. The NFV service platform is also in charge of managing the life-cycle of NFV network services and network slices: i) an NFV network service is composed of chained VNFs or cloud-native network functions (CNFs) deployed on VM and/or containers; ii) a network slice is composed of one or several concatenated NFV network services that deploy a set of VNFs and/or CNFs.

## 6 Key performance indicators

For the implementation of the SUCCESS-6G-EXTEND innovations, the project defines specific key performance indicators (KPIs). The considered use cases revolve around real-time monitoring of vehicles and software updates for vehicles. To ensure the successful realization of these use cases with the deployment of a 5G SA private network at Circuit ParcMotor with two 5G radios, the KPIs are defined towards achieving a high-quality 5G network and comprehensive 5G coverage. This involves guaranteeing reliable and stable connectivity throughout the designated area.

Additionally, the applications running on the edge of the network need to meet high-performance standards. This includes low latency, high bandwidth, and seamless data transfer to support the real-time monitoring and software updates. Such requirements emphasize the need for a robust and efficient 5G infrastructure that can deliver reliable connectivity and support the demanding applications running on the network's edge.

### 6.1 User story: Vehicular condition monitoring with robust V2X connectivity

<u>KPI</u>	<u>Definition</u>	<u>Unit</u>	<u>Relevant SUCCESS-6G enabler</u>
<b>Number and frequency of failures</b>	Number and occurrence of the anomalies in the vehicular equipment operation.	Absolute number	<ul style="list-style-type: none"> <li>-End-to-end condition monitoring, failure identification, and visualization for V2X systems</li> <li>-Data analytics for informed decision-making regarding the vehicles condition status</li> <li>-C-V2X OBU</li> </ul>
<b>Remaining useful lifetime (RUL)</b>	The time duration a monitored component is likely to operate before it requires repair or replacement. By taking RUL into account, maintenance can be scheduled, operating efficiency can be optimized, and unplanned downtime can be avoided.	Time	<ul style="list-style-type: none"> <li>End-to-end condition monitoring, failure identification, and visualization for V2X systems</li> </ul>
<b>Downtime</b>	Defined as the time duration during which the vehicular component's working conditions are affected by a failure which results in a faulty operation.	Time	<ul style="list-style-type: none"> <li>-End-to-end condition monitoring, failure identification, and visualization for V2X systems</li> <li>-C-V2X OBU</li> </ul>
<b>Maintenance response time</b>	Defined as the time elapsed from the detection of the failure until the equipment works properly again.	Time	<ul style="list-style-type: none"> <li>End-to-end condition monitoring, failure identification, and visualization for V2X systems</li> </ul>

<b>Reliability</b>	The reliability rate for C-V2X message delivery is typically 99%, ensuring that critical messages are successfully transmitted.	%	C-V2X OBU
<b>Coverage</b>	C-V2X systems aim to achieve network coverage over 95% of the designated area, providing reliable communication across a wide range.	%	C-V2X OBU
<b>Packet Loss Ratio (PLR)</b>	PLR is defined as the ratio of the number of data packets lost to the total number of packets that should have been forwarded by a network node. This metric is typically associated with QoS considerations and the amount of tolerable packet losses (e.g., 1% or 5%-10%) depends on the type of data being sent.	%	Imputation of incomplete vehicular measurement streams
<b>Occlusion length</b>	Occlusion length is defined as the amount of consecutive missing samples in a training dataset owing to communication deficiencies.	Number of samples	Imputation of incomplete vehicular measurement streams
<b>Velocity</b>	Speed and direction of motion of a vehicle	Km/h	C-V2X OBU

Table 3: KPIs for user story of use case 1

## 6.2 User story: Over-the-air vehicular software updates with robust V2X connectivity

<u>KPI</u>	<u>Definition</u>	<u>Unit</u>	<u>Relevant SUCCESS-6G enabler</u>
<b>Update Success Rate</b>	This KPI measures the percentage of vehicles that successfully receive and apply the over-the-air software updates without any issues or failures. It reflects the reliability and effectiveness of the update process.	%	-Location-aware SDN controller and Service Orchestrator -C-V2X OBU
<b>Update Completion Time</b>	This metric tracks the average time taken for a vehicle to download and apply the software update. A shorter completion time indicates a more efficient and timely update process.	seconds	-Location-aware SDN controller and Service Orchestrator -C-V2X OBU
<b>Update Latency</b>	This metric measures the delay between the availability of the update and its deployment to the vehicles. Lower update latency ensures that	Seconds	-Location-aware SDN controller and Service

	vehicles are promptly protected against vulnerabilities and equipped with the latest features.		Orchestrator -C-V2X OBU
<b>V2X Connectivity Reliability</b>	This KPI evaluates the stability and consistency of the Vehicle-to-Everything (V2X) communication, which is crucial for delivering over-the-air updates securely. It measures the rate of successful V2X transmissions.	%	-Location-aware SDN controller and Service Orchestrator -C-V2X OBU
<b>Data Usage Efficiency</b>	This KPI measures the amount of data consumed during the update process. Efficient use of data helps reduce costs and ensures that the updates can be delivered over varying network conditions.	bits	Location-aware SDN controller and Service Orchestrator
<b>Update Rollout Time</b>	This KPI measures the time taken to distribute the software update to all eligible vehicles in the fleet. A faster rollout time ensures that all vehicles are up-to-date promptly.	seconds	-Location-aware SDN controller and Service Orchestrator -C-V2X OBU

Table 4: KPIs for user story of use case 2.

### 6.3 5G network relevant KPIs

The KPIs that affect a network can vary depending on the context and specific objectives of the network. However, the following tables summarize some common KPIs that are relevant for evaluating the performance and efficiency of a network regarding the defined use cases.

- KPIs can be extracted from the core:

<u>KPI</u>	<u>Category</u>	<u>Definition</u>	<u>Unit</u>
Number of seconds this system has been running	SYSTEM STATUS	raemis_kpi_raemis	Hours, minutes, seconds
max_attached users permitted	SYSTEM STATUS	raemis_kpi_raemis	Number
Max attached radios permitted	SYSTEM STATUS	raemis_kpi_raemis	Number
Number of attached Radios	RADIOS	raemis_kpi_ran	Number
Number of active radios (more than 1 user attached)	RADIOS	raemis_kpi_ran	Number
number of paging failures – Since the last poll	RADIOS	raemis_kpi_ran	Number
Number of attached Users	USERS	raemis_kpi_subscribers	Number

Number of Active Users (not idle mode)	USERS	raemis_kpi_subscribers	Number
average CPU usage for PS	CPU USAGE	raemis_kpi_system_dp_load	%
Current UL bits per second on S1-U/N3	TROUGHPUT	raemis_kpi_dp_throughput	Mbps
Current DL bits per second on S1-U/N3	TROUGHPUT	raemis_kpi_dp_throughput	Mbps
Current UL bits per second on Sgi/N6	TROUGHPUT	raemis_kpi_dp_throughput	Mbps
Current DL bits per second on Sgi/N6	TROUGHPUT	raemis_kpi_dp_throughput	Mbps
Control Plane Latency	LATENCY	raemis_kpi_monitor	ms
User Plane Latency	LATENCY	raemis_kpi_monitor	ms
Event Latency	LATENCY	raemis_kpi_monitor	ms

Table 5: Network KPIs that can be extracted from the core.

- KPIs can be extracted from the final user (e2e):

<u>KPI</u>	<u>Definition</u>	<u>Unit</u>	<u>Expected performance range</u>
<b>Uptime</b>	Measures the amount of time the network is available and functioning properly. High uptime is an indicator of a stable and reliable network.	%	
<b>Latency</b>	The time it takes for a data packet to travel from its source to its destination. Low latency is crucial for ensuring fast and smooth communication on the network.	ms	Node 8 min/avg/max [20-35ms] [25-40ms] [40-65ms]  Node 1 min/avg/max [9-20ms] [10-30ms] [50-65ms]
<b>Bandwidth</b>	Measures the amount of data that can be transmitted through the network in a given period of time. Adequate bandwidth is essential for supporting traffic load and avoiding bottlenecks.	Hz	Max 100Mhz
<b>DL (downlink) throughput</b> - Very good radio conditions - Good radio	Indicates the speed at which data can be downloaded across the network. High throughput is important for efficient communication and a smooth user experience.	Mbps	Node 8 [60Mbps-80Mbps]

<b>conditions</b> - Medium radio conditions			Node 1 [300Mbps-400Mbps]
<b>UL (uplink) throughput</b> - Very good radio conditions - Good radio conditions - Medium radio conditions	Indicates the speed at which data can be sent across the network. High throughput is important for efficient communication and a smooth user experience.	Mbps	Node 8 [5Mbps-8Mbps] Node 1 [140Mbps-150Mbps]
<b>Reliability</b>	Measures the likelihood that the network operates without errors or interruptions. A reliable network minimizes downtime and ensures constant connectivity.	%	
<b>Communication range</b>	Communication range is the maximum distance between a transmitter and its intended receiver allowing communication with a targeted packet size, latency, and reliability, and for a given effective transmit power and receiver sensitivity.	Meters/ Kilometres	
<b>RSRQ</b>	Reference Signal Received Quality: Quality considering also RSSI and the number of used Resource Blocks (N) $RSRQ = (N * RSRP) / RSSI$ measured over the same bandwidth. RSRQ is a C/I type of measurement, and it indicates the quality of the received reference signal. The RSRQ measurement provides additional information when RSRP is not sufficient to make a reliable handover or cell reselection decision.	dB	
<b>RSRP</b>	Reference Signal Received Power: RSRP is a RSSI type of measurement, as follows there are some definitions of it and some details as well. It is the power of the LTE Reference Signals spread over the full bandwidth and narrowband. A minimum of -20 dB SINR (of the S-Synch channel) is needed to detect RSRP/RSRQ	dB	
<b>SNR</b>	Compares the level of a desired signal to the level of background noise	dB	
<b>Signal Strength</b>	Signal strength	dB	

Table 6: Network KPIs that can be extracted from the final user (e2e)

## 7 Conclusions

This deliverable focuses on the elaboration of the vehicular use cases that will be targeted by SUCCESS-6G-EXTEND project and presents the initial set of innovations that will be developed by project partners to address the technical challenges associated with these use cases. Each SUCCESS-6G-EXTEND use case has been elaborated around a user story, which describes, among others, the involved actors, their roles, main event flows and service requirements.

The SUCCESS-6G-EXTEND technical innovations focus on various beyond-5G advancements and cover diverse aspects of the use cases, including enhancements to the 5G architecture to support V2X services. Notably, the key role of AI is highlighted in several technical assets to be developed by partners. Data-driven intelligence will be leveraged to improve multiple aspects of the system performance. In addition, MEC is expected to play a crucial role in providing infrastructure and orchestrating MEC platforms. For the implementation and validation of the SUCCESS-6G-EXTEND innovative solutions in the context of the use cases, the project partners will make use of both real-environment and lab facilities, depending on the envisioned technology readiness level for each innovation. Finally, an initial set of service level requirements and key performance indicators have been defined for each user story.

## 8 References

- [1] C. Kalalas and J. Alonso-Zarate, "Sensor data reconstruction in industrial environments with cellular connectivity," in 2020 IEEE International Symposium on Personal, Indoor and Mobile Radio Communications (IEEE PIMRC '20), August 2020.
- [2] L. Li, J. McCann, N. S. Pollard, and C. Faloutsos, "Dynammo: Mining and summarization of coevolving sequences with missing values," in Proceedings of the 15<sup>th</sup> ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, ser. KDD '09. New York, NY, USA: Association for Computing Machinery, 2009, p. 507–516. [Online]. Available: <https://doi.org/10.1145/1557019.1557078>
- [3] N. Srebro and T. Jaakkola, "Weighted low-rank approximations," in Proceedings of the Twentieth International Conference on International Conference on Machine Learning, ser. ICML'03. AAAI Press, 2003, p. 720–727.
- [4] S. L. Brunton and J. N. Kutz, Data-Driven Science and Engineering: Machine Learning, Dynamical Systems, and Control. Cambridge University Press, 2019.
- [5] R. Sedar, C. Kalalas, F. Vázquez-Gallego, L. Alonso and J. Alonso-Zarate, "A Comprehensive Survey of V2X Cybersecurity Mechanisms and Future Research Paths," in IEEE Open Journal of the Communications Society, vol. 4, pp. 325-391, January 2023, doi: 10.1109/OJCOMS.2023.3239115.
- [6] R. Sedar, C. Kalalas, F. Vazquez-Gallego, J. Alonso-Zarate, "Reinforcement Learning Based Misbehaviour Detection in Vehicular Networks," in Proc. of IEEE International Conference on Communications 2022 (IEEE ICC '22), Seoul, South Korea, May 2022.
- [7] P. Mulinka, C. Kalalas, M. Dzaferagic, I. Macaluso, D. Gutierrez-Rojas, P. Nardelli, and N. Marchetti, "Information Processing and Data Visualization in Networked Industrial Systems," in Proc. of IEEE International Symposium on Personal, Indoor and Mobile Radio Communications 2021 (IEEE PIMRC '21), virtual conference, September 2021.
- [8] P. Mulinka, S. Sahoo, C. Kalalas, P. Nardelli, "Optimizing a Digital Twin for Fault Diagnosis in Grid Connected Inverters - A Bayesian Approach", in Proc. of IEEE Energy Conversion Congress and Exposition 2022 (IEEE ECCE '22), Detroit, Michigan, USA, October 2022.

[end of document]